



HIT-RE 500 V4 INJECTION MORTAR

Technical Datasheet

Update: Jan-23





HIT-RE 500 V4 injection mortar

Anchor design (EN 1992-4) / Rods and Sleeves / Concrete

Injection mortar system



Foil pack: HIT-RE 500 V4
(available in 330, 500 and 1400 ml cartridges)



Anchor rod:
HAS-U (HDG, A4, HCR)
HAS-U
HAS-U A4
HAS-U HCR
AM 8.8 (HDG)
(M8-M39)



Internally threaded sleeve:
HIS-N
HIS-RN
(M8-M20)

Benefits

- **SafeSet** technology: Simplified method of borehole preparation using either Hilti hollow drill bit for hammer drilling or Roughening tool for diamond cored applications
- Suitable for non-cracked and cracked concrete C 20/25 to C 50/60
- High loading capacity
- Suitable for dry and water saturated concrete
- Hilti Technical Data for under water application
- ETA Data for 100y working life
- High corrosion resistance
- Long working time at elevated temperatures
- Cures down to -5 °C
- Odourless epoxy

Base material




Concrete (non-cracked)



Concrete (cracked)

Installation conditions




Hammer drilled holes




Diamond drilled holes



Hilti **SafeSet** technology




Small edge distance and spacing



Variable embedment depth

Load conditions



Static/
quasi-static



Seismic,
ETA-C1, C2

100
YEARS


Working life
100 years,
ETA



European
Technical
Assessment



CE conformity



Corrosion
resistance



High
corrosion
resistance ¹⁾



PROFIS
Engineering
design
Software

Other information

¹⁾ High Corrosion Resistant (HCR) rods available only for HAS-U.

Approvals / certificates

Description	Authority / Laboratory	No. / date of issue
European Technical Assessment ^{a)}	CSTB	ETA-20/0541 / 2021-09-04
Engineering Judgement (120-years working life based on EAD 330499-01-0601)	BERGMEISTER, Vienna	No.: 10/2021
Shockproof fastenings in civil defence installations	Federal Office for Civil Protection, Bern	BZS D 21-602/ 2021-10-25

^{a)} All data given in this section according to ETA-20/0541, issue 2021-09-04 (if not stated otherwise).

Static and quasi-static resistance (for a single anchor) – Working life 50 years

All data in this section applies to:

- Correct setting (see setting instruction)
- No edge distance and spacing influence
- Steel failure
- HAS-U anchor rod with strength class 5.8 and 8.8, AM anchor rod with strength class 8.8, HIS-N internally threaded insert with screw 8.8
- Base material thickness and embedment depth, as specified in the table
- Concrete C 20/25
- In-service temperature range I: -40 °C to +40 °C
(min. base material temperature -40 °C, max. long/short term base material temperature: +24 °C/40 °C)
- Short term loading. For long term loading apply ψ_{sus} acc. to EN 1992-4
Hammer drilled holes, hammer drilled holes with hollow drill bit and diamond cored holes with Hilti roughening tool: $\psi_{\text{sus}}^0 = 0,88$; diamond cored holes: $\psi_{\text{sus}}^0 = 0,89$

Embedment depth^{a)} and base material thickness

Anchor size	ETA-20/0541, issued 2021-09-04								Hilti tech. data			
	M8	M10	M12	M16	M20	M24	M27	M30	M33	M36	M39	
HAS-U												
Effective anchorage depth	h_{ef} [mm]	80	90	110	125	170	210	240	270	300	330	360
Base material thickness	h [mm]	110	120	140	161	214	266	300	340	374	410	444
HIS-N												
Effective anchorage depth	h_{ef} [mm]	90	110	125	170	205	-	-	-	-	-	-
Base material thickness	h [mm]	120	150	170	230	270	-	-	-	-	-	-

^{a)} The allowed range of embedment depth is shown in the setting details.

For hammer drilled holes, hammer drilled holes with hollow drill bit¹⁾ and diamond cored with Hilti roughening tool TE-YRT²⁾:

Characteristic resistance

Anchor size	ETA-20/0541, issued 2021-09-04								Hilti tech. data			
	M8	M10	M12	M16	M20	M24	M27	M30	M33	M36	M39	
Non-cracked concrete												
Tension	HAS-U 5.8	18,3	29,0	42,2	68,8	109,0	149,7	182,9	218,2	255,6	294,9	336,0
	HAS-U 8.8, AM 8.8	29,3	42,0	56,8	68,8	109,0	149,7	182,9	218,2	255,6	294,9	336,0
	HAS-U A4	25,6	40,6	56,8	68,8	109,0	149,7	182,9	218,2	255,6	294,9	336,0
	HAS-U HCR	29,3	42,0	56,8	68,8	109,0	149,7	182,9	218,2	255,6	294,9	336,0
	HIS-N 8.8	25,0	46,0	67,0	109,0	116,0	-	-	-	-	-	-
Shear	HAS-U 5.8	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3	208,2	245,1	292,8
	HAS-U 8.8, AM 8.8	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4	277,6	326,8	390,4
	HAS-U A4	12,8	20,3	29,5	55,0	85,8	123,6	114,8	140,3	173,5	204,3	244,0
	HAS-U HCR	14,6	23,2	33,7	62,8	98,0	123,6	160,7	196,4	173,5	204,3	244,0
	HIS-N 8.8	13,0	23,0	34,0	63,0	58,0	-	-	-	-	-	-
Cracked concrete												
Tension	HAS-U 5.8	15,1	25,4	39,7	48,1	76,3	104,8	128,0	152,8	-	-	-
	HAS-U 8.8, AM 8.8	15,1	25,4	39,7	48,1	76,3	104,8	128,0	152,8	-	-	-
	HAS-U A4	15,1	25,4	39,7	48,1	76,3	104,8	128,0	152,8	-	-	-
	HAS-U HCR	15,1	25,4	39,7	48,1	76,3	104,8	128,0	152,8	-	-	-
	HIS-N 8.8	25,0	39,7	48,1	76,3	101,1	-	-	-	-	-	-
Shear	HAS-U 5.8	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3	-	-	-
	HAS-U 8.8, AM 8.8	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4	-	-	-
	HAS-U A4	12,8	20,3	29,5	55,0	85,8	123,6	114,8	140,3	-	-	-
	HAS-U HCR	14,6	23,2	33,7	62,8	98,0	123,6	160,7	196,4	-	-	-
	HIS-N 8.8	13,0	23,0	34,0	63,0	58,0	-	-	-	-	-	-

¹⁾ Hilti hollow drill bit available for element size M12-M30.

²⁾ Hilti Roughening tools are available for element size M16-M30.



Design resistance

Anchor size		ETA-20/0541, issued 2021-09-04							Hilti tech. data					
		M8	M10	M12	M16	M20	M24	M27	M30	M33	M36	M39		
Non-cracked concrete														
Tension	HAS-U 5.8	N _{Rd}	[kN]	12,2	19,3	28,1	45,8	72,7	99,8	121,9	145,5	142,0	163,8	186,7
	HAS-U 8.8, AM 8.8			19,5	28,0	37,8	45,8	72,7	99,8	121,9	145,5	142,0	163,8	186,7
	HAS-U A4			13,7	21,7	31,6	45,8	72,7	99,8	80,2	98,1	121,3	142,8	170,6
	HAS-U HCR			19,5	28,0	37,8	45,8	72,7	99,8	121,9	145,5	142,0	163,8	186,7
	HIS-N 8.8			16,7	30,7	44,7	72,7	77,3	-	-	-	-	-	-
Shear	HAS-U 5.8	V _{Rd}	[kN]	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6	166,6	196,1	234,2
	HAS-U 8.8, AM 8.8			11,7	18,6	27,0	50,2	78,4	113,0	146,9	179,5	222,1	261,4	312,3
	HAS-U A4			8,2	13,0	18,9	35,2	55,0	79,2	48,2	58,9	72,9	85,8	102,5
	HAS-U HCR			11,7	18,6	27,0	50,2	78,4	70,6	91,8	112,2	87,0	102,0	122,0
	HIS-N 8.8			10,4	18,4	27,2	50,4	46,4	-	-	-	-	-	-
Cracked concrete														
Tension	HAS-U 5.8	N _{Rd}	[kN]	10,0	17,0	26,5	32,1	50,9	69,9	85,4	101,8	-	-	-
	HAS-U 8.8, AM 8.8			10,0	17,0	26,5	32,1	50,9	69,9	85,4	101,8	-	-	-
	HAS-U A4			10,0	17,0	26,5	32,1	50,9	69,9	80,2	98,1	-	-	-
	HAS-U HCR			10,0	17,0	26,5	32,1	50,9	69,9	85,4	101,8	-	-	-
	HIS-N 8.8			16,7	26,5	32,1	50,9	67,4	-	-	-	-	-	-
Shear	HAS-U 5.8	V _{Rd}	[kN]	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6	-	-	-
	HAS-U 8.8, AM 8.8			11,7	18,6	27,0	50,2	78,4	113,0	146,9	179,5	-	-	-
	HAS-U A4			8,2	13,0	18,9	35,2	55,0	79,2	48,2	58,9	-	-	-
	HAS-U HCR			11,7	18,6	27,0	50,2	78,4	70,6	91,8	112,2	-	-	-
	HIS-N 8.8			10,4	18,4	27,2	50,4	46,4	-	-	-	-	-	-

Recommended loads^{a)}

Anchor size		ETA-20/0541, issued 2021-09-04							Hilti tech. data					
		M8	M10	M12	M16	M20	M24	M27	M30	M33	M36	M39		
Non-cracked concrete														
Tension	HAS-U 5.8	N _{Rec}	[kN]	8,7	13,8	20,1	32,7	51,9	71,3	87,1	103,9	101,4	117,0	133,3
	HAS-U 8.8, AM 8.8			13,9	20,0	27,0	32,7	51,9	71,3	87,1	103,9	101,4	117,0	133,3
	HAS-U A4			9,8	15,5	22,5	32,7	51,9	71,3	57,3	70,1	86,7	102,0	121,9
	HAS-U HCR			13,9	20,0	27,0	32,7	51,9	71,3	87,1	103,9	101,4	117,0	133,3
	HIS-N 8.8			11,9	21,9	31,9	51,9	55,2	-	-	-	-	-	-
Shear	HAS-U 5.8	V _{Rec}	[kN]	6,3	9,9	14,5	26,9	42,0	60,5	78,7	96,2	119,0	140,1	167,3
	HAS-U 8.8, AM 8.8			8,4	13,3	19,3	35,9	56,0	80,7	104,9	128,2	158,6	186,7	223,1
	HAS-U A4			5,9	9,3	13,5	25,2	39,3	56,6	34,4	42,1	52,1	61,3	73,2
	HAS-U HCR			8,4	13,3	19,3	35,9	56,0	50,4	65,6	80,1	62,1	72,9	87,1
	HIS-N 8.8			7,4	13,1	19,4	36,0	33,1	-	-	-	-	-	-
Cracked concrete														
Tension	HAS-U 5.8	N _{Rec}	[kN]	7,2	12,1	18,9	22,9	36,3	49,9	61,0	72,7	-	-	-
	HAS-U 8.8, AM 8.8			7,2	12,1	18,9	22,9	36,3	49,9	61,0	72,7	-	-	-
	HAS-U A4			7,2	12,1	18,9	22,9	36,3	49,9	57,3	70,1	-	-	-
	HAS-U HCR			7,2	12,1	18,9	22,9	36,3	49,9	61,0	72,7	-	-	-
	HIS-N 8.8			11,9	18,9	22,9	36,3	48,1	-	-	-	-	-	-
Shear	HAS-U 5.8	V _{Rec}	[kN]	6,3	9,9	14,5	26,9	42,0	60,5	78,7	96,2	-	-	-
	HAS-U 8.8, AM 8.8			8,4	13,3	19,3	35,9	56,0	80,7	104,9	128,2	-	-	-
	HAS-U A4			5,9	9,3	13,5	25,2	39,3	56,6	34,4	42,1	-	-	-
	HAS-U HCR			8,4	13,3	19,3	35,9	56,0	50,4	65,6	80,1	-	-	-
	HIS-N 8.8			7,4	13,1	19,4	36,0	33,1	-	-	-	-	-	-

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.

**For diamond drilling:
Characteristic resistance**

Anchor size		ETA-20/0541, issued 2021-09-04							
		M8	M10	M12	M16	M20	M24	M27	M30
Non-cracked concrete									
Tension N_{Rk}	HAS-U 5.8	18,3	29,0	42,2	68,8	109,0	149,7	182,9	218,2
	HAS-U 8.8, AM 8.8	26,1	36,7	53,9	68,8	109,0	149,7	182,9	218,2
	HAS-U A4	25,6	36,7	53,9	68,8	109,0	149,7	182,9	218,2
	HAS-U HCR	26,1	36,7	53,9	68,8	109,0	149,7	182,9	218,2
	HIS-N 8.8	25,0	46,0	67,0	109,0	116,0	-	-	-
Shear V_{Rk}	HAS-U 5.8	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3
	HAS-U 8.8, AM 8.8	14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
	HAS-U A4	12,8	20,3	29,5	55,0	85,8	123,6	114,8	140,3
	HAS-U HCR	14,6	23,2	33,7	62,8	98,0	123,6	160,7	196,4
	HIS-N 8.8	13,0	23,0	34,0	63,0	58,0	-	-	-

Design resistance

Anchor size		ETA-20/0541, issued 2021-09-04							
		M8	M10	M12	M16	M20	M24	M27	M30
Non-cracked concrete									
Tension N_{Rd}	HAS-U 5.8	12,2	19,3	28,1	32,7	51,9	71,3	87,1	103,9
	HAS-U 8.8, AM 8.8	14,5	20,4	29,9	32,7	51,9	71,3	87,1	103,9
	HAS-U A4	13,7	20,4	29,9	32,7	51,9	71,3	80,2	98,1
	HAS-U HCR	14,5	20,4	29,9	32,7	51,9	71,3	87,1	103,9
	HIS-N 8.8	16,7	24,4	32,7	51,9	68,8	-	-	-
Shear V_{Rd}	HAS-U 5.8	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6
	HAS-U 8.8, AM 8.8	11,7	18,6	27,0	50,2	78,4	113,0	146,9	179,5
	HAS-U A4	8,2	13,0	18,9	35,2	55,0	79,2	48,2	58,9
	HAS-U HCR	11,7	18,6	27,0	50,2	78,4	70,6	91,8	112,2
	HIS-N 8.8	10,4	18,4	27,2	50,4	46,4	-	-	-

Recommended loads^{a)}

Anchor size		ETA-20/0541, issued 2021-09-04							
		M8	M10	M12	M16	M20	M24	M27	M30
Non-cracked concrete									
Tension N_{Rec}	HAS-U 5.8	8,7	13,8	20,1	23,4	37,1	50,9	62,2	74,2
	HAS-U 8.8, AM 8.8	10,4	14,6	21,4	23,4	37,1	50,9	62,2	74,2
	HAS-U A4	9,8	14,6	21,4	23,4	37,1	50,9	57,3	70,1
	HAS-U HCR	10,4	14,6	21,4	23,4	37,1	50,9	62,2	74,2
	HIS-N 8.8	11,9	17,5	23,4	37,1	49,1	-	-	-
Shear V_{Rec}	HAS-U 5.8	6,3	9,9	14,5	26,9	42,0	60,5	78,7	96,2
	HAS-U 8.8, AM 8.8	8,4	13,3	19,3	35,9	56,0	80,7	104,9	128,2
	HAS-U A4	5,9	9,3	13,5	25,2	39,3	56,6	34,4	42,1
	HAS-U HCR	8,4	13,3	19,3	35,9	56,0	50,4	65,6	80,1
	HIS-N 8.8	7,4	13,1	19,4	36,0	33,1	-	-	-

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.



Static and quasi-static resistance (for a single anchor) – Working life 100 years

All data in this section applies to:

- Correct setting (see setting instruction)
- No edge distance and spacing influence
- Steel failure
- HAS-U anchor rod with strength class 5.8 and 8.8, AM anchor rod with strength class 8.8, HIS-N internally threaded insert with screw 8.8
- Base material thickness and one typical embedment depth, as specified in the table
- Concrete C 20/25
- In-service temperature range I: -40 °C to +40 °C
(min. base material temperature -40 °C, max. long/short term base material temperature: +24 °C/40 °C)
- Short term loading. For long term loading apply ψ_{sus} acc. to EN 1992-4

Embedment depth ^{a)} and base material thickness

Anchor size			ETA-20/0541, issued 2021-09-04							
			M8	M10	M12	M16	M20	M24	M27	M30
HAS-U										
Effective anchorage depth	h_{ef}	[mm]	80	90	110	125	170	210	240	270
Base material thickness	h	[mm]	110	120	140	161	214	266	300	340
HIS-N										
Effective anchorage depth	h_{ef}	[mm]	90	110	125	170	205	-	-	-
Base material thickness	h	[mm]	120	150	170	230	270	-	-	-

^{a)} The allowed range of embedment depth is shown in the setting details.

For hammer drilled holes, hammer drilled holes with hollow drill bit¹⁾ and diamond cored with Hilti roughening tool²⁾:

Characteristic resistance

Anchor size				ETA-20/0541, issued 2021-09-04							
				M8	M10	M12	M16	M20	M24	M27	M30
Non-cracked concrete											
Tension	HAS-U 5.8	N_{Rk}	[kN]	18,3	29,0	42,2	68,8	109,0	149,7	182,9	218,2
	HAS-U 8.8, AM 8.8			29,3	42,0	56,8	68,8	109,0	149,7	182,9	218,2
	HAS-U A4			25,6	40,6	56,8	68,8	109,0	149,7	182,9	218,2
	HAS-U HCR			29,3	42,0	56,8	68,8	109,0	149,7	182,9	218,2
	HIS-N 8.8			25,0	46,0	67,0	109,0	116,0	-	-	-
Shear	HAS-U 5.8	V_{Rk}	[kN]	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3
	HAS-U 8.8, AM 8.8			14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
	HAS-U A4			12,8	20,3	29,5	55,0	85,8	123,6	114,8	140,3
	HAS-U HCR			14,6	23,2	33,7	62,8	98,0	123,6	160,7	196,4
	HIS-N 8.8			13,0	23,0	34,0	63,0	58,0	-	-	-
Cracked concrete											
Tension	HAS-U 5.8	N_{Rk}	[kN]	14,1	22,6	37,3	48,1	76,3	104,8	128,0	152,8
	HAS-U 8.8, AM 8.8			14,1	22,6	37,3	48,1	76,3	104,8	128,0	152,8
	HAS-U A4			14,1	22,6	37,3	48,1	76,3	104,8	128,0	152,8
	HAS-U HCR			14,1	22,6	37,3	48,1	76,3	104,8	128,0	152,8
	HIS-N 8.8			24,7	39,7	48,1	76,3	101,1	-	-	-
Shear	HAS-U 5.8	V_{Rk}	[kN]	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3
	HAS-U 8.8, AM 8.8			14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
	HAS-U A4			12,8	20,3	29,5	55,0	85,8	123,6	114,8	140,3
	HAS-U HCR			14,6	23,2	33,7	62,8	98,0	123,6	160,7	196,4
	HIS-N 8.8			13,0	23,0	34,0	63,0	58,0	-	-	-

¹⁾ Hilti hollow drill bit available for element size M12-M30.

²⁾ Hilti Roughening tools are available for element size M16-M30.

Design resistance

Anchor size		ETA-20/0541, issued 2021-09-04									
		M8	M10	M12	M16	M20	M24	M27	M30		
Non-cracked concrete											
Tension	HAS-U 5.8	N _{Rd}	[kN]	12,2	19,3	28,1	45,8	72,7	99,8	121,9	145,5
	HAS-U 8.8, AM 8.8			19,5	28,0	37,8	45,8	72,7	99,8	121,9	145,5
	HAS-U A4			13,7	21,7	31,6	45,8	72,7	99,8	80,2	98,1
	HAS-U HCR			19,5	28,0	37,8	45,8	72,7	99,8	121,9	145,5
	HIS-N 8.8			16,7	30,7	44,7	72,7	77,3	-	-	-
Shear	HAS-U 5.8	V _{Rd}	[kN]	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6
	HAS-U 8.8, AM 8.8			11,7	18,6	27,0	50,2	78,4	113,0	146,9	179,5
	HAS-U A4			8,2	13,0	18,9	35,2	55,0	79,2	48,2	58,9
	HAS-U HCR			11,7	18,6	27,0	50,2	78,4	70,6	91,8	112,2
	HIS-N 8.8			10,4	18,4	27,2	50,4	46,4	-	-	-
Cracked concrete											
Tension	HAS-U 5.8	N _{Rd}	[kN]	9,4	15,1	24,9	32,1	50,9	69,9	85,4	101,8
	HAS-U 8.8, AM 8.8			9,4	15,1	24,9	32,1	50,9	69,9	85,4	101,8
	HAS-U A4			9,4	15,1	24,9	32,1	50,9	69,9	80,2	98,1
	HAS-U HCR			9,4	15,1	24,9	32,1	50,9	69,9	85,4	101,8
	HIS-N 8.8			16,5	26,5	32,1	50,9	67,4	-	-	-
Shear	HAS-U 5.8	V _{Rd}	[kN]	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6
	HAS-U 8.8, AM 8.8			11,7	18,6	27,0	50,2	78,4	113,0	146,9	179,5
	HAS-U A4			8,2	13,0	18,9	35,2	55,0	79,2	48,2	58,9
	HAS-U HCR			11,7	18,6	27,0	50,2	78,4	70,6	91,8	112,2
	HIS-N 8.8			10,4	18,4	27,2	50,4	46,4	-	-	-

Recommended loads^{a)}

Anchor size		ETA-20/0541, issued 2021-09-04									
		M8	M10	M12	M16	M20	M24	M27	M30		
Non-cracked concrete											
Tension	HAS-U 5.8	N _{Rec}	[kN]	8,7	13,8	20,1	32,7	51,9	71,3	87,1	103,9
	HAS-U 8.8, AM 8.8			13,9	20,0	27,0	32,7	51,9	71,3	87,1	103,9
	HAS-U A4			9,8	15,5	22,5	32,7	51,9	71,3	57,3	70,1
	HAS-U HCR			13,9	20,0	27,0	32,7	51,9	71,3	87,1	103,9
	HIS-N 8.8			11,9	21,9	31,9	51,9	55,2	-	-	-
Shear	HAS-U 5.8	V _{Rec}	[kN]	6,3	9,9	14,5	26,9	42,0	60,5	78,7	96,2
	HAS-U 8.8, AM 8.8			8,4	13,3	19,3	35,9	56,0	80,7	104,9	128,2
	HAS-U A4			5,9	9,3	13,5	25,2	39,3	56,6	34,4	42,1
	HAS-U HCR			8,4	13,3	19,3	35,9	56,0	50,4	65,6	80,1
	HIS-N 8.8			7,4	13,1	19,4	36,0	33,1	-	-	-
Cracked concrete											
Tension	HAS-U 5.8	N _{Rec}	[kN]	6,7	10,8	17,8	22,9	36,3	49,9	61,0	72,7
	HAS-U 8.8, AM 8.8			6,7	10,8	17,8	22,9	36,3	49,9	61,0	72,7
	HAS-U A4			6,7	10,8	17,8	22,9	36,3	49,9	57,3	70,1
	HAS-U HCR			6,7	10,8	17,8	22,9	36,3	49,9	61,0	72,7
	HIS-N 8.8			11,8	18,9	22,9	36,3	48,1	-	-	-
Shear	HAS-U 5.8	V _{Rec}	[kN]	6,3	9,9	14,5	26,9	42,0	60,5	78,7	96,2
	HAS-U 8.8, AM 8.8			8,4	13,3	19,3	35,9	56,0	80,7	104,9	128,2
	HAS-U A4			5,9	9,3	13,5	25,2	39,3	56,6	34,4	42,1
	HAS-U HCR			8,4	13,3	19,3	35,9	56,0	50,4	65,6	80,1
	HIS-N 8.8			7,4	13,1	19,4	36,0	33,1	-	-	-

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.



For diamond coring:

Characteristic resistance

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Non-cracked concrete										
Tension	HAS-U 5.8	N _{Rk} [kN]	18,3	29,0	42,2	68,8	109,0	149,7	182,9	218,2
	HAS-U 8.8, AM 8.8		26,1	36,7	53,9	68,8	109,0	149,7	182,9	218,2
	HAS-U A4		26,0	36,7	53,9	68,8	109,0	149,7	182,9	218,2
	HAS-U HCR		26,1	36,7	53,9	68,8	109,0	149,7	182,9	218,2
	HIS-N 8.8		25,0	46,0	67,0	109,0	116	-	-	-
Shear	HAS-U 5.8	V _{Rk} [kN]	11,0	17,4	25,3	47,1	73,5	105,9	137,7	168,3
	HAS-U 8.8, AM 8.8		14,6	23,2	33,7	62,8	98,0	141,2	183,6	224,4
	HAS-U A4		12,8	20,3	29,5	55,0	85,8	123,6	114,8	140,3
	HAS-U HCR		14,6	23,2	33,7	62,8	98,0	123,6	160,7	196,4
	HIS-N 8.8		13,0	23,0	34,0	63,0	58,0	-	-	-

Design resistance

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Non-cracked concrete										
Tension	HAS-U 5.8	N _{Rd} [kN]	12,2	19,3	28,1	32,7	51,9	71,3	87,1	103,9
	HAS-U 8.8, AM 8.8		14,5	20,4	29,9	32,7	51,9	71,3	87,1	103,9
	HAS-U A4		13,7	20,4	29,9	32,7	51,9	71,3	80,4	98,1
	HAS-U HCR		14,5	20,4	29,9	32,7	51,9	71,3	87,1	103,9
	HIS-N 8.8		16,7	24,4	32,7	51,9	68,8	-	-	-
Shear	HAS-U 5.8	V _{Rd} [kN]	8,8	13,9	20,2	37,7	58,8	84,7	110,2	134,6
	HAS-U 8.8, AM 8.8		11,7	18,6	27,0	50,2	78,4	113,0	146,9	179,5
	HAS-U A4		8,2	13,0	18,9	35,2	55,0	79,2	48,2	58,9
	HAS-U HCR		11,7	18,6	27,0	50,2	78,4	70,6	91,8	112,2
	HIS-N 8.8		10,4	18,4	27,2	50,4	46,4	-	-	-

Recommended loads^{a)}

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Non-cracked concrete										
Tension	HAS-U 5.8	N _{Rd} [kN]	8,7	13,8	20,1	23,4	37,1	50,9	62,2	74,2
	HAS-U 8.8, AM 8.8		10,4	14,6	21,4	23,4	37,1	50,9	62,2	74,2
	HAS-U A4		9,8	14,6	21,4	23,4	37,1	50,9	57,3	70,1
	HAS-U HCR		10,4	14,6	21,4	23,4	37,1	50,9	62,2	74,2
	HIS-N 8.8		11,9	17,5	23,4	37,1	49,1	-	-	-
Shear	HAS-U 5.8	V _{Rd} [kN]	6,3	9,9	14,5	26,9	42,0	60,5	78,7	96,2
	HAS-U 8.8, AM 8.8		8,4	13,3	19,3	35,9	56,0	80,7	104,9	128,2
	HAS-U A4		5,9	9,3	13,5	25,2	39,3	56,6	34,4	42,1
	HAS-U HCR		8,4	13,3	19,3	35,9	56,0	50,4	65,6	80,1
	HIS-N 8.8		7,4	13,1	19,4	36,0	33,1	-	-	-

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.

Seismic resistance (for a single anchor) – Working life 50 years

All data in this section applies to:

- Correct setting (see setting instruction)
- No edge distance and spacing influence
- Steel failure
- HAS-U anchor rod with strength class 8.8, AM anchor rod with strength class 8.8, HIS-N internally threaded insert with screw 8.8
- Base material thickness and one typical embedment depth, as specified in the table
- Concrete C 20/25
- In-service temperature range I
(min. base material temperature -40 °C, max. long/short term base material temperature: +24 °C/40 °C)
- $\alpha_{\text{gap}}=1,0$ (using Hilti seismic filling set) or $\alpha_{\text{gap}}=0,5$ (without using Hilti seismic filling set) accordingly

Embedment depth and base material thickness for seismic C2^{a)} and C1

Anchor size		ETA-20/0541, issued 2021-09-04							
		M8	M10	M12	M16	M20	M24	M27	M30
HAS-U									
Effective anchorage depth	h_{ef} [mm]	80	90	110	125	170	210	240	270
Base material thickness	h [mm]	110	120	140	161	214	266	300	340
HIS-N									
Effective anchorage depth	h_{ef} [mm]	90	110	125	170	205	-	-	-
Base material thickness	h [mm]	120	146	169	226	269	-	-	-

a) C2 seismic approval only available for HAS-U rods.

For hammer drilled holes and hammer drilled holes with Hilti hollow drill bit¹⁾:

Characteristic resistance in case of seismic performance category C2

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Tension	HAS-U 8.8, AM 8.8	$N_{\text{Rk,seis}}$ [kN]	-	-	15,3	40,8	61,9	89,1	101,7	129,9
	HAS-U 8.8 HDG, AM 8.8 HDG		-	-	15,3	40,8	61,9	89,1	101,7	129,9
with Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{\text{Rk,seis}}$ [kN]	-	-	28,0	46,0	77,0	103,0	- ²⁾	- ²⁾
	HAS-U 8.8 HDG, AM 8.8 HDG		-	-	18,0	30,0	46,0	66,0	- ²⁾	- ²⁾
without Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{\text{Rk,seis}}$ [kN]	-	-	12,0	20,0	35,5	45,0	60,5	67,5
	HAS-U 8.8 HDG, AM 8.8 HDG		-	-	9,0	15,0	23,0	33,0	- ³⁾	- ³⁾

1) Hilti hollow drill bit available for element size M12-M30;

2) Hilti filling set is not available in size M27, M30;

3) No performance assessed

Design resistance in case of seismic performance category C2

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Tension	HAS-U 8.8, AM 8.8	$N_{\text{Rd,seis}}$ [kN]	-	-	10,2	27,2	41,3	59,4	67,8	86,6
	HAS-U 8.8 HDG, AM 8.8 HDG		-	-	10,2	27,2	41,3	59,4	67,8	86,6
with Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{\text{Rd,seis}}$ [kN]	-	-	22,4	36,8	61,6	82,4	- ²⁾	- ²⁾
	HAS-U 8.8 HDG, AM 8.8 HDG		-	-	14,4	24,0	36,8	52,8	- ²⁾	- ²⁾
without Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{\text{Rd,seis}}$ [kN]	-	-	9,6	16,0	28,4	36,0	48,4	54,0
	HAS-U 8.8 HDG, AM 8.8 HDG		-	-	7,2	12,0	18,4	26,4	- ³⁾	- ³⁾

1) Hilti hollow drill bit available for element size M12-M30;

2) Hilti filling set is not available in size M27, M30

3) No performance assessed



For hammer drilled holes and hammer drilled holes with Hilti hollow drill bit¹⁾:

Characteristic resistance in case of seismic performance category C1

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Tension	HAS-U 8.8, AM 8.8	$N_{Rk,seis}$ [kN]	13,7	23,2	33,8	40,9	64,9	89,1	108,8	129,9
	HIS-N 8.8		25,0	33,8	40,9	64,9	85,9	-	-	-
with Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{Rk,seis}$ [kN]	14,6	23,2	33,7	62,8	98,0	141,2	- ²⁾	- ²⁾
	HIS-N 8.8		9,0	16,0	27,0	41,0	39,0	-	-	-
without Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{Rk,seis}$ [kN]	7,3	11,6	16,9	31,4	49,0	70,6	91,8	112,2
	HIS-N 8.8		4,5	8,0	13,5	20,5	19,5			

1) Hilti hollow drill bit available for element size M12-M30;

2) Hilti filling set is not available in size M27, M30

Design resistance in case of seismic performance category C1

Anchor size		ETA-20/0541, issued 2021-09-04								
		M8	M10	M12	M16	M20	M24	M27	M30	
Tension	HAS-U 8.8, AM 8.8	$N_{Rd,seis}$ [kN]	9,1	15,4	22,5	27,3	43,3	59,4	72,6	86,6
	HIS-N 8.8		16,7	22,5	27,3	43,3	57,3	-	-	-
with Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{Rd,seis}$ [kN]	11,7	18,6	27,0	50,2	78,4	113,0	- ²⁾	- ²⁾
	HIS-N 8.8		7,2	12,8	21,6	32,8	31,2	-	-	-
without Hilti filling set										
Shear	HAS-U 8.8, AM 8.8	$V_{Rd,seis}$ [kN]	5,9	9,3	13,5	25,1	39,2	56,5	73,4	89,8
	HIS-N 8.8		3,6	6,4	10,8	16,4	15,6	-	-	-

1) Hilti hollow drill bit available for element size M12-M30;

2) Hilti filling set is not available in size M27, M30

Materials

Mechanical properties for HAS-U

Anchor size		ETA-20/0541, issued 2021-09-04							Hilti tech. data				
		M8	M10	M12	M16	M20	M24	M27	M30	M33	M36	M39	
Nominal tensile strength	HAS-U 5.8 (HDG)	f_{uk} [N/mm ²]	500	500	500	500	500	500	500	500	500	500	
	HAS-U 8.8 (HDG)		800	800	800	800	800	800	800	800	800	800	
	AM 8.8 (HDG)		800	800	800	800	800	800	800	800	800	800	
	HAS-U A4		700	700	700	700	700	700	500	500	500	500	
	HAS-U HCR		800	800	800	800	800	700	700	700	500	500	
Yield strength	HAS-U 5.8 (HDG)	f_{yk} [N/mm ²]	400	400	400	400	400	400	400	400	400	400	
	HAS-U 8.8 (HDG)		640	640	640	640	640	640	640	640	640	640	
	AM 8.8 (HDG)		640	640	640	640	640	640	640	640	640	640	
	HAS-U A4		450	450	450	450	450	450	210	210	210	210	
	HAS-U HCR		640	640	640	640	640	400	400	400	250	250	
Stressed cross-section	HAS-U, AM 8.8	A_s [mm ²]	36,6	58,0	84,3	157	245	353	459	561	694	817	976
Moment of resistance	HAS-U, AM 8.8	W [mm ³]	31,2	62,3	109	277	541	935	1387	1874	2579	3294	4301

Mechanical properties for HIS-N

Anchor size		ETA-20/0541, issued 2021-09-04					
		M8	M10	M12	M16	M20	
Nominal tensile strength	HIS-N	f_{uk} [N/mm ²]	490	490	460	460	460
	Screw 8.8		800	800	800	800	800
	HIS-RN		700	700	700	700	700
	Screw A4-70		700	700	700	700	700
Yield strength	HIS-N	f_{yk} [N/mm ²]	410	410	375	375	375
	Screw 8.8		640	640	640	640	640
	HIS-RN		350	350	350	350	350
	Screw A4-70		450	450	450	450	450
Stressed cross-section	HIS-(R)N	A_s [mm ²]	51,5	108	169	256	238
	Screw		36,6	58	84,3	157	245
Moment of resistance	HIS-(R)N	W [mm ³]	145	430	840	1595	1543
	Screw		31,2	62,3	109	277	541



Material quality for HAS-U

Part	Material
Zinc coated steel	
Threaded rod, HAS-U 5.8 (HDG)	Strength class 5.8; Elongation at fracture A5 > 8% ductile Electroplated zinc coated $\geq 5\mu\text{m}$; (F) hot dip galvanized $\geq 50\mu\text{m}$
Threaded rod, HAS-U 8.8 (HDG)	Strength class 8.8; Elongation at fracture A5 > 12% ductile Electroplated zinc coated $\geq 5\mu\text{m}$; (F) hot dip galvanized $\geq 50\mu\text{m}$
Hilti Meter rod, AM 8.8 (HDG)	Strength class 8.8; Elongation at fracture A5 > 12% ductile Electroplated zinc coated $\geq 5\mu\text{m}$ (HDG) hot dip galvanized $\geq 50\mu\text{m}$
Washer	Electroplated zinc coated $\geq 5\mu\text{m}$, hot dip galvanized $\geq 50\mu\text{m}$
Nut	Strength class of nut adapted to strength class of threaded rod. Electroplated zinc coated $\geq 5\mu\text{m}$, hot dip galvanized $\geq 50\mu\text{m}$
Stainless Steel	
Threaded rod, HAS-U A4	Strength class 70 for $\leq M24$ and strength class 50 for $> M24$; Elongation at fracture A5 > 8% ductile Stainless steel 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362
Washer	Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
Nut	Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
High corrosion resistant steel	
Threaded rod, HAS-U HCR	Strength class 80 for $\leq M20$ and class 70 for $> M20$, Elongation at fracture A5 > 8% ductile High corrosion resistance steel 1.4529; 1.4565;
Washer	High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014
Nut	High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014

Material quality for HIS-N

Part	Material	
HIS-N	Internal threaded sleeve	C-steel 1.0718; Steel galvanized $\geq 5\mu\text{m}$
	Screw 8.8	Strength class 8.8, A5 > 8 % ductile; Steel galvanized $\geq 5\mu\text{m}$
HIS-RN	Internal threaded sleeve	Stainless steel 1.4401, 1.4571
	Screw 70	Strength class 70, A5 > 8 % ductile Stainless steel 1.4401; 1.4404, 1.4578; 1.4571; 1.4439; 1.4362

Setting information

Installation temperature

-5 °C to +40 °C

Service temperature range

Hilti HIT-RE 500 V4 injection mortar may be applied in the temperature ranges given below. An elevated base material temperature may lead to a reduction of the design bond resistance.

Temperature range	Base material temperature	Maximum long term base material temperature	Maximum short term base material temperature
Temperature range I	-40 °C to +40 °C	+24 °C	+40 °C
Temperature range II	-40 °C to +55 °C	+43 °C	+55 °C
Temperature range III	-40 °C to +75 °C	+55 °C	+75 °C

Maximum short term base material temperature

Short-term elevated base material temperatures are those that occur over brief intervals, e.g. as a result of diurnal cycling.

Maximum long term base material temperature

Long-term elevated base material temperatures are roughly constant over significant periods of time.

Working time and curing time

Temperature of the base material $T_{BM}^{2)}$	Maximum working time t_{work}	Minimum curing time $t_{cure}^{1)}$
-5 °C to -1 °C	2 h	168 h
0 °C to 4 °C	2 h	48 h
5 °C to 9 °C	2 h	24 h
10 °C to 14 °C	1,5 h	16 h
15 °C to 19 °C	1 h	12 h
20 °C to 24 °C	30 min	7 h
25 °C to 29 °C	20 min	6 h
30 °C to 34 °C	15 min	5 h
35 °C to 39 °C	12 min	4,5 h
40 °C	10 min	4 h

¹⁾ The curing time data are valid for dry base material only. In wet base material, the curing times must be doubled.

²⁾ The minimum temperature of the foil pack is +5° C.




Setting details for HAS-U

Anchor size			ETA-20/0541, issued 2021-09-04							Hilti tech. data			
			M8	M10	M12	M16	M20	M24	M27	M30	M33	M36	M39
Nominal diameter of element	d	[mm]	8	10	12	16	20	24	27	30	33	36	39
Nominal diameter of drill bit	d ₀	[mm]	10	12	14	18	22	28	30	35	37	40	42
Effective anchorage depth (=drill hole depth) ^{a)}	h _{ef,min} = h ₀	[mm]	60	60	70	80	90	96	108	120	132	144	156
	h _{ef,max} = h ₀	[mm]	160	200	240	320	400	480	540	600	660	720	780
Minimum base material thickness	h _{min}	[mm]	h _{ef} +30 mm ≥ 100 mm			h _{ef} + 2 d ₀							
Maximum installation torque	T _{max}	[Nm]	10	20	40	80	150	200	270	300	330	360	390
Minimum spacing	s _{min}	[mm]	40	50	60	75	90	115	120	140	165	180	195
Minimum edge distance	c _{min}	[mm]	40	45	45	50	55	60	75	80	165	180	195
Critical spacing for splitting failure	s _{cr,sp}	[mm]	2 C _{cr,sp}										
Critical edge distance for splitting failure ^{b)}	C _{cr,sp}	[mm]	1,0 · h _{ef}		for h / h _{ef} ≥ 2,0								
			4,6 h _{ef} - 1,8 h		for 2,0 > h / h _{ef} > 1,3								
			2,26 h _{ef}		for h / h _{ef} ≤ 1,3								
Critical spacing for concrete cone failure	s _{cr,N}	[mm]	2 C _{cr,N}										
Critical edge distance for concrete cone failure	C _{cr,N}	[mm]	1,5 h _{ef}										


For spacing (edge distance) smaller than critical spacing (critical edge distance) the design loads have to be reduced.

a) $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$ (h_{ef}: embedment depth)

b) h: base material thickness (h ≥ h_{min})



HAS-U...

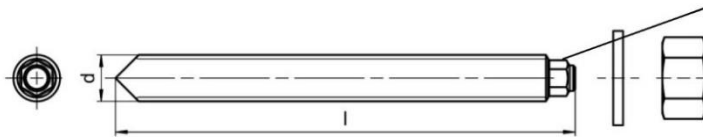

Marking:


Steel grade number and length identification letter: e.g. 8 L

Setting details for HIS-N


Anchor size			ETA-20/0541, issued 2021-09-04				
			M8	M10	M12	M16	M20
Nominal diameter of drill bit	d_0	[mm]	14	18	22	28	32
Diameter of element	d	[mm]	12,5	16,5	20,5	25,4	27,6
Effective anchorage and drill hole depth	$h_{ef} = h_0$	[mm]	90	110	125	170	205
Minimum base material thickness	h_{min}	[mm]	120	150	170	230	270
Diameter of clearance hole in the fixture	d_f	[mm]	9	12	14	18	22
Thread engagement length; min - max	h_s	[mm]	8-20	10-25	12-30	16-40	20-50
Minimum spacing	s_{min}	[mm]	60	70	90	115	130
Minimum edge distance	c_{min}	[mm]	40	45	55	65	90
Critical spacing for splitting failure	$s_{cr,sp}$	[mm]	$2 c_{cr,sp}$				
Critical edge distance for splitting failure ^{a)}	$c_{cr,sp}$	[mm]	$1,0 \cdot h_{ef}$ for $h / h_{ef} \geq 2,0$				
			$4,6 h_{ef} - 1,8 h$ for $2,0 > h / h_{ef} > 1,3$				
			$2,26 h_{ef}$ for $h / h_{ef} \leq 1,3$				
Critical spacing for concrete cone failure	$s_{cr,N}$	[mm]	$2 c_{cr,N}$				
Critical edge distance for concrete cone failure	$c_{cr,N}$	[mm]	$1,5 h_{ef}$				
Maximum installation torque	T_{max}	[Nm]	10	20	40	80	150

For spacing (edge distance) smaller than critical spacing (critical edge distance) the design loads have to be reduced.

^{a)} h : base material thickness ($h \geq h_{min}$)



Internally threaded sleeve HIS-(R)N...

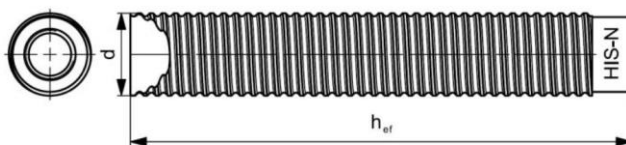

Marking:
 Identifying mark - HILTI and
 embossing "HIS-N" (for zinc coated steel)
 embossing "HIS-RN" (for stainless steel)



Installation equipment

Anchor size		M8	M10	M12	M16	M20	M24	M27	M30	M36	M39	
Rotary hammer	HAS-U	TE 2 – TE 16				TE 40 – TE 80						
	HIS-N	TE 2 – TE 16		TE 40 – TE 80			-					
Other tools		compressed air gun, set of cleaning brushes, dispenser										
		roughening tools TE-YRT									-	
Additional Hilti recommended tools (diamond coring tools)		DD EC-1, DD 100 ... DD 160									-	

Parameters of cleaning and setting tools

HAS-U	HIS-N	Drill bit diameters d ₀ [mm]				Installation	
		Hammer drill (HD)	Hollow Drill Bit (HDB) ^{a)}	Diamond coring		Brush HIT-RB	Piston plug HIT-SZ
				Diamond coring (DD)	with roughening tool (RT)		
M8	-	10	-	10	-	10	-
M10	-	12	12	12	-	12	12
M12	M8	14	14	14	-	14	14
M16	M10	18	18	18	18	18	18
M20	M12	22	22	22	22	22	22
M24	M16	28	28	28	28	28	28
M27	-	30	-	30	30	30	30
-	M20	32	32	32	32	32	32
M30	-	35	35	35	35	35	35
M33 ^{b)}	-	37 ^{b)}	-	-	-	37 ^{b)}	37 ^{b)}
M36 ^{b)}	-	40 ^{b)}	-	-	-	40 ^{b)}	40 ^{b)}
M39 ^{b)}	-	42 ^{b)}	-	-	-	42 ^{b)}	42 ^{b)}

a) No cleaning required.

b) Additional Hilti technical data

Associated components for the use of Hilti Roughening tool TE-YRT

Diamond coring		Roughening tool TE-YRT		Wear gauge RTG...
d ₀ [mm]		d ₀ [mm]		size
nominal	measured			
18	17,9 to 18,2	18		18
20	19,9 to 20,2	20		20
22	21,9 to 22,2	22		22
25	24,9 to 25,2	25		25
28	27,9 to 28,2	28		28
30	29,9 to 30,2	30		30
32	31,9 to 32,2	32		32
35	34,9 to 35,2	35		35

Minimum roughening time t_{roughen} (t_{roughen} [sec] = h_{ef} [mm] / 10)

h _{ef} [mm]	t _{roughen} [sec]
0 to 100	10
101 to 200	20
201 to 300	30
301 to 400	40
401 to 500	50
501 to 600	60

Setting instructions


*For detailed information on installation see instruction for use given with the package of the product.



Safety regulations


Review the Material Safety Data Sheet (MSDS) before use for proper and safe handling! Wear well-fitting protective goggles and protective gloves when working with Hilti HIT-RE 500 V4.

Drilling

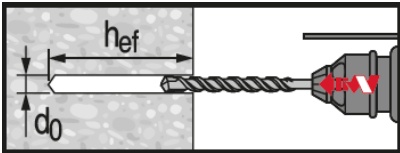


Hammer drilled hole

For dry and wet concrete and installation in flooded holes (no sea water).

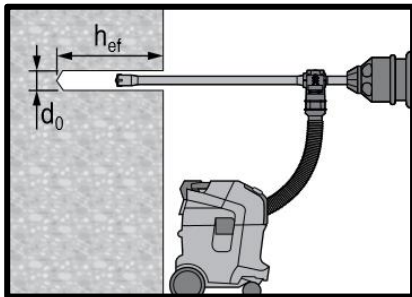


Hammer drilled hole with Hollow Drilled Bit (HDB)

No cleaning required.
For dry and wet concrete, only.




Diamond Coring

For dry and wet concrete, only.




Diamond Coring + Roughening Tool

For dry and wet concrete only.
Before roughening, the borehole needs to be dry.




Cleaning (Inadequate hole cleaning = poor load values.)

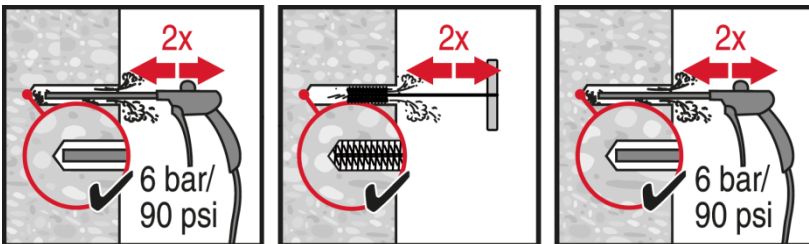

Hammer Drilling:

Compressed air cleaning (CAC)


For all drill hole diameters d_0 and all drill hole depths h_0 .

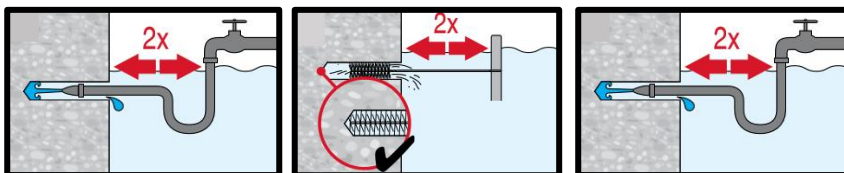

Hammer drilling:


Cleaning for under water:

For all bore hole diameters d_0 and all bore hole depth h_0 .

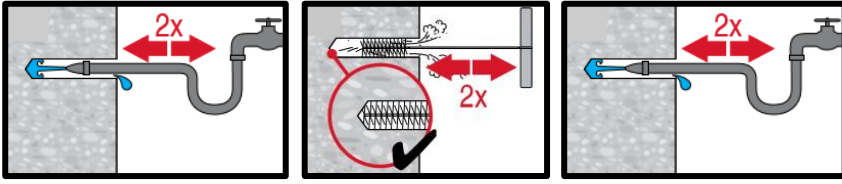


Hammer drilled flooded holes and diamond cored holes:

For all drill hole diameters d_0 and drill hole depths h_0 .


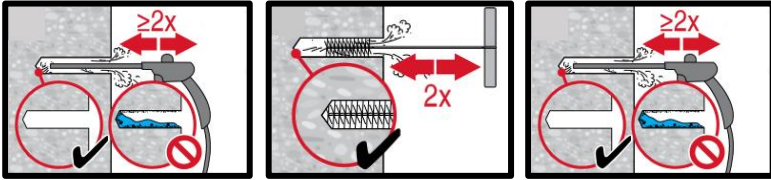


Diamond cored holes with Hilti roughening tool:



For all drill hole diameters d_0 and drill hole depths h_0 .

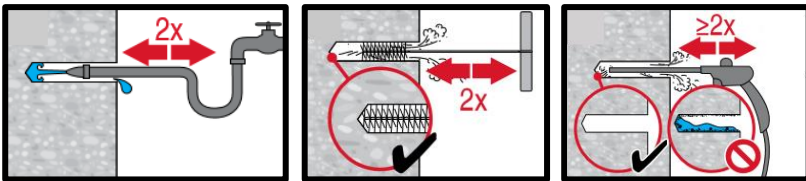



Injection preparation

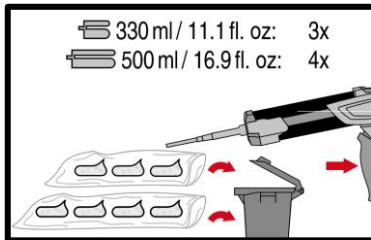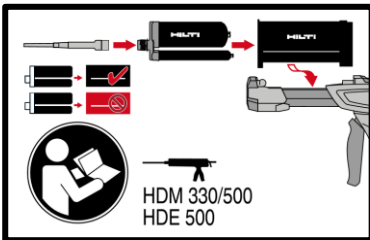



Injection system preparation.

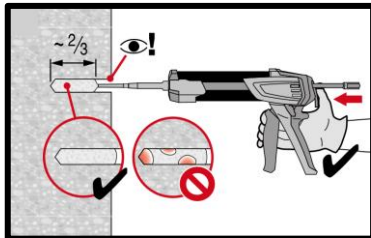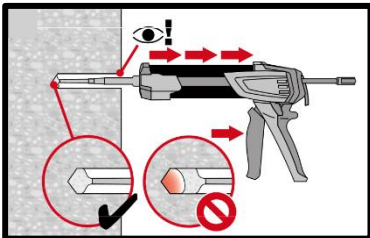

Injection method for drill hole depth $h_{ef} \leq 250$ mm.

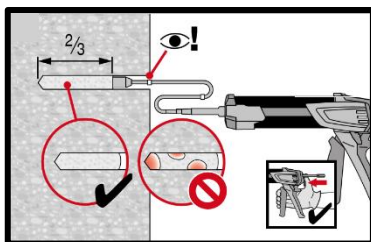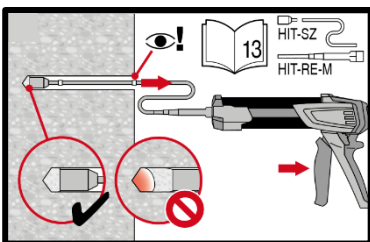


Injection method for drill hole depth $h_{ef} > 250$ mm.

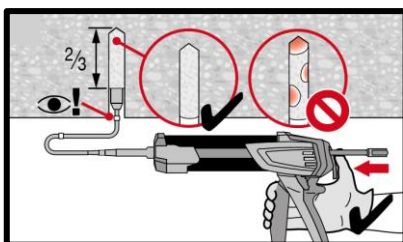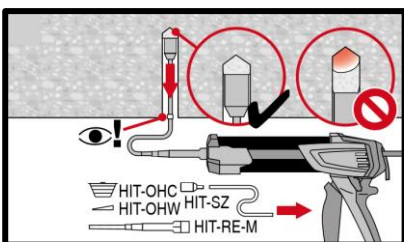


Injection method for overhead application.


Setting the element

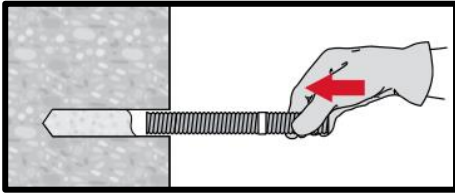


Setting element, observe working time " t_{work} ".

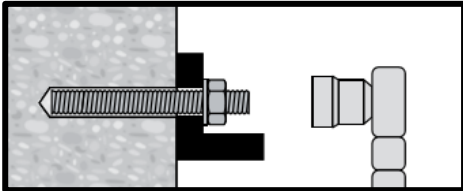

Loading the anchor after required curing time t_{cure} the anchor can be loaded. The applied installation torque shall not exceed max. T_{inst} .

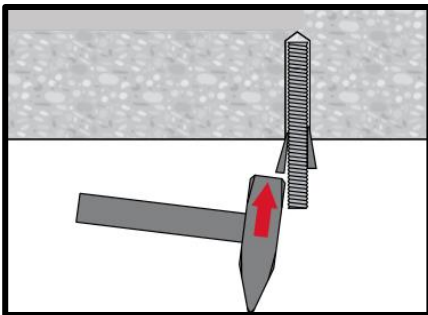

Setting element for overhead applications, observe working time " t_{work} ".

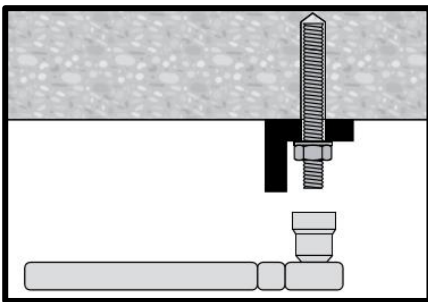

Loading the anchor after required curing time t_{cure} the anchor can be loaded. The applied installation torque shall not exceed max. T_{inst} .



HIT-RE 500 V4 injection mortar

Anchor design (EN 1992-4) / Rebar elements / Concrete

Injection mortar system



Foil pack: HIT-RE 500 V4
(Available in 330, 500 and 1400 ml cartridges)



Rebar B500
($\phi 8$ - $\phi 40$)

Benefits

- **SafeSet** technology: Simplified method of borehole preparation using either Hilti hollow drill bit for hammer drilling or Roughening tool for diamond cored applications
- Suitable for non-cracked and cracked concrete C 20/25 to C 50/60
- ETA approval for seismic performance category C1
- ETA Data for 100y working life
- High loading capacity
- Suitable for dry and water saturated concrete
- Hilti Technical Data for under water application
- Long working time to allow installation of big diameters and/or deep embedment depths even at higher temperature
- Cures down to -5 °C

Base material




Concrete (non-cracked)



Concrete (cracked)



Dry concrete



Wet concrete



Static/quasi-static




Seismic, ETA-C1

100
YEARS

Working life 100y, ETA

Load conditions

Installation conditions




Hammer drilling



Diamond coring



Hilti **SafeSet** technology



Small edge distance and spacing



European Technical Assessment



CE conformity



PROFIS Engineering design Software

Other informations

Approvals / certificates

Description	Authority / Laboratory	No. / date of issue
European technical Assessment ^{a)}	CSTB, Marne la Vallée	ETA-20/0541 / 2021-09-04

^{a)} All data given in this section according to ETA-20/0541 issue 2021-09-04 (if not stated otherwise).

Static and quasi-static loading (for a single anchor) – Working life 50 years

All data in this section applies to

- Correct setting (see setting instruction)
- No edge distance and spacing influence
- Steel failure
- Rebar B500
- Base material thickness and embedment depth, as specified in the table
- Concrete C 20/25
- In-service temperature range I: -40 °C to +40 °C
(min. base material temperature -40°C, max. long/short term base material temperature: +24°C/40°C)
- Short term loading. For long term loading apply ψ_{sus} acc. to EN 1992-4
Hammer drilled holes, hammer drilled holes with hollow drill bit and diamond cored holes with Hilti roughening tool: $\psi^0_{\text{sus}} = 0,88$; diamond cored holes: $\psi^0_{\text{sus}} = 0,89$

Embedment depth and base material thickness for static and quasi-static loading data

Rebar size		ETA-20/0541, issued 2021-09-04											Hilti tech. data		
		φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40
Embedment depth	h_{ef} [mm]	80	90	110	125	125	150	170	190	210	270	270	300	330	360
Base material thickness	h [mm]	110	120	142	161	165	194	220	250	274	340	344	380	420	470

For hammer drilled holes, hammer drilled holes with hollow drill bit¹⁾ and diamond cored with Hilti roughening tool TE-YRT²⁾:

Characteristic resistance

Rebar size			ETA-20/0541, issued 2021-09-04											Hilti tech. data			
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40	
Non-cracked concrete																	
Tension	Rebar B500B	N_{Rk} [kN]	20,1	42,0	56,8	68,8	68,8	90,4	109,0	128,8	149,7	218,2	218,2	255,6	294,9	336,0	
Shear	Rebar B500B	V_{Rk} [kN]	14,0	22,0	31,0	42,0	55,0	70,0	86,0	124,0	135,0	169,0	194,0	221,0	280,0	346,0	
Cracked concrete																	
Tension	Rebar B500B	N_{Rk} [kN]	11,1	28,3	39,7	48,1	48,1	63,3	76,3	90,2	104,8	152,8	152,8	178,9	-	-	
Shear	Rebar B500B	V_{Rk} [kN]	14,0	22,0	31,0	42,0	55,0	70,0	86,0	124,0	135,0	169,0	194,0	221,0	-	-	

¹⁾ Hilti hollow drill bit available for element size φ10-φ28.

²⁾ Hilti Roughening tools are available for element size φ14-φ28.

Design resistance

Rebar size			ETA-20/0541, issued 2021-09-04											Hilti tech. data			
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40	
Non-cracked concrete																	
Tension	Rebar B500B	N_{Rd} [kN]	13,4	28,0	37,8	45,8	45,8	60,2	72,7	85,9	99,8	145,5	145,5	170,4	163,8	186,7	
Shear	Rebar B500B	V_{Rd} [kN]	9,3	14,7	20,7	28,0	36,7	46,7	57,3	82,7	90,0	112,7	129,3	147,3	186,7	230,7	
Cracked concrete																	
Tension	Rebar B500B	N_{Rd} [kN]	7,4	18,8	26,5	32,1	32,1	42,2	50,9	60,1	69,9	101,8	101,8	119,3	-	-	
Shear	Rebar B500B	V_{Rd} [kN]	9,3	14,7	20,7	28,0	36,7	46,7	57,3	82,7	90,0	112,7	129,3	147,3	-	-	

Recommended loads^{a)}

Rebar size			ETA-20/0541, issued 2021-09-04											Hilti tech. data			
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40	
Non-cracked concrete																	
Tension	Rebar B500B	N_{rec} [kN]	9,6	20,0	27,0	32,7	32,7	43,0	51,9	61,4	71,3	103,9	103,9	121,7	117,0	133,3	
Shear	Rebar B500B	V_{rec} [kN]	6,7	10,5	14,8	20,0	26,2	33,3	41,0	59,0	64,3	80,5	92,4	105,2	133,3	164,8	
Cracked concrete																	
Tension	Rebar B500B	N_{rec} [kN]	5,3	13,5	18,9	22,9	22,9	30,1	36,3	42,9	49,9	72,7	72,7	85,2	-	-	
Shear	Rebar B500B	V_{rec} [kN]	6,7	10,5	14,8	20,0	26,2	33,3	41,0	59,0	64,3	80,5	92,4	105,2	-	-	

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.



**For diamond cored holes:
Characteristic resistance**

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete														
Tension	Rebar B500B	N _{Rk} [kN]	19,1	26,9	39,4	52,2	59,7	80,5	101,4	128,8	149,7	218,2	218,2	255,6
Shear	Rebar B500B	V _{Rk} [kN]	14,0	22,0	31,0	42,0	55,0	70,0	86,0	124,0	135,0	169,0	194,0	221,0

Design resistance

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete														
Tension	Rebar B500B	N _{Rd} [kN]	10,6	14,9	21,9	29,0	28,4	38,4	48,3	61,4	71,3	103,9	103,9	121,7
Shear	Rebar B500B	V _{Rd} [kN]	9,3	14,7	20,7	28,0	36,7	46,7	57,3	82,7	90,0	112,7	129,3	147,3

Recommended loads^{a)}

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete														
Tension	Rebar B500B	N _{rec} [kN]	7,6	10,7	15,6	20,7	20,3	27,4	34,5	43,8	50,9	74,2	74,2	86,9
Shear	Rebar B500B	V _{rec} [kN]	6,7	10,5	14,8	20,0	26,2	33,3	41,0	59,0	64,3	80,5	92,4	105,2

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.

Static and quasi-static resistance (for a single anchor) - Working life 100 years

All data in this section applies to

- Correct setting (see setting instruction)
- No edge distance and spacing influence
- Steel failure
- Base material thickness and one typical embedment depth, as specified in the table
- Concrete C 20/25
- In-service temperature range I: -40 °C to +40 °C
(min. base material temperature -40 °C, max. long/short term base material temperature: +24 °C/40 °C)
- Short term loading. For long term loading apply ψ_{SUS} acc. to EN 1992-4.

Embedment depth and base material thickness for static and quasi-static loading data

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Embedment depth	h_{ef}	[mm]	80	90	110	125	125	150	170	190	210	270	270	300
Base material thickness	h	[mm]	110	120	142	161	165	194	220	250	274	340	344	380

For hammer drilled holes, hammer drilled holes with hollow drill bit¹⁾ and diamond cored with Hilti roughening tool TE-YRT²⁾:

Characteristic resistance

Rebar size				ETA-20/0541, issued 2021-09-04											
				φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete															
Tension	Rebar B500B	N_{Rk}	[kN]	20,1	42,0	56,8	68,8	68,8	90,4	109,0	128,8	149,7	218,2	218,2	255,6
Shear	Rebar B500B	V_{Rk}	[kN]	14,0	22,0	31,0	42,0	55,0	70,0	86,0	124,0	135,0	169,0	194,0	221,0
Cracked concrete															
Tension	Rebar B500B	N_{Rk}	[kN]	10,1	25,4	39,7	48,1	48,1	63,3	76,3	90,2	104,8	152,8	152,8	178,9
Shear	Rebar B500B	V_{Rk}	[kN]	14,0	22,0	31,0	42,0	55,0	70,0	86,0	124,0	135,0	169,0	194,0	221,0

¹⁾ Hilti hollow drill bit available for element size φ10-φ28.

²⁾ Hilti Roughening tools are available for element size φ14-φ28.

Design resistance

Rebar size				ETA-20/0541, issued 2021-09-04											
				φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete															
Tension	Rebar B500B	N_{Rd}	[kN]	13,4	28,0	37,8	45,8	45,8	60,2	72,7	85,9	99,8	145,5	145,5	170,4
Shear	Rebar B500B	V_{Rd}	[kN]	9,3	14,7	20,7	28,0	36,7	46,7	57,3	82,7	90,0	112,7	129,3	147,3
Cracked concrete															
Tension	Rebar B500B	N_{Rd}	[kN]	6,7	17,0	26,5	32,1	32,1	42,2	50,9	60,1	69,9	101,8	101,8	119,3
Shear	Rebar B500B	V_{Rd}	[kN]	9,3	14,7	20,7	28,0	36,7	46,7	57,3	82,7	90,0	112,7	129,3	147,3

Recommended load^{a)}

Rebar size				ETA-20/0541, issued 2021-09-04											
				φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete															
Tension	Rebar B500B	N_{rec}	[kN]	9,6	20,0	27,0	32,7	32,7	43,0	51,9	61,4	71,3	103,9	103,9	121,7
Shear	Rebar B500B	V_{rec}	[kN]	6,7	10,5	14,8	20,0	26,2	33,3	41,0	59,0	64,3	80,5	92,4	105,2
Cracked concrete															
Tension	Rebar B500B	N_{rec}	[kN]	4,8	12,1	18,9	22,9	22,9	30,1	36,3	42,9	49,9	72,7	72,7	85,2
Shear	Rebar B500B	V_{rec}	[kN]	6,7	10,5	14,8	20,0	26,2	33,3	41,0	59,0	64,3	80,5	92,4	105,2

^{a)} With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.



**For diamond cored holes:
Characteristic resistance**

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete														
Tension	Rebar B500B	N_{Rk} [kN]	19,1	26,9	39,4	52,2	59,7	80,5	101,4	128,8	149,7	218,2	218,2	255,6
Shear	Rebar B500B	V_{Rk} [kN]	14,0	22,0	31,0	42,0	55,0	70,0	86,0	124,0	135,0	169,0	194,0	221,0

Design resistance

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete														
Tension	Rebar B500B	N_{Rd} [kN]	10,6	14,9	21,9	29,0	28,4	38,4	48,3	61,4	71,3	103,9	103,9	121,7
Shear	Rebar B500B	V_{Rd} [kN]	9,3	14,7	20,7	28,0	36,7	46,7	57,3	82,7	90,0	112,7	129,3	147,3

Recommended load^{a)}

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Non-cracked concrete														
Tension	Rebar B500B	N_{rec} [kN]	7,6	10,7	15,6	20,7	20,3	27,4	34,5	43,8	50,9	74,2	74,2	86,9
Shear	Rebar B500B	V_{rec} [kN]	6,7	10,5	14,8	20,0	26,2	33,3	41,0	59,0	64,3	80,5	92,4	105,2

a) With overall partial safety factor for action $\gamma=1,4$. The partial safety factors for action depend on the type of loading and shall be taken from national regulations.

Seismic loading (for a single anchor) - Working life 50 years

All data in this section applies to:

- Correct setting (see setting)
- No edge distance and spacing influence
- Steel failure
- Base material thickness and embedment depth, as specified in the table
- Concrete C 20/25
- In-service temperate range I
(min. base material temperature -40 °C, max. long term/short term base material temperature: +24 °C/40 °C)
- $\alpha_{\text{gap}} = 1,0$

Embedment depth and base material thickness in case of seismic performance category C1

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Embedment depth	h_{ef}	[mm]	-	90	110	125	125	150	170	190	210	270	270	300
Base material thickness	h	[mm]	-	120	142	161	165	194	220	250	274	340	344	380

For hammer drilled holes, hammer drilled holes with hollow drill bit¹⁾ and diamond cored with Hilti roughening tool TE-YRT²⁾:

Characteristic resistance in case of seismic performance category C1

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Tension	Rebar B500B	$N_{\text{Rk,seis}}$ [kN]	-	25,0	33,8	40,9	40,9	53,8	64,9	76,7	89,1	129,9	129,9	152,1
Shear	Rebar B500B	$V_{\text{Rk,seis}}$ [kN]	-	15,0	22,0	29,0	39,0	49,0	60,0	87,0	95,0	118,0	136,0	155,0

¹⁾ Hilti hollow drill bit available for element size φ10-φ28.

²⁾ Roughening tools are available for element size φ14-φ28.

Design resistance in case of seismic performance category C1

Rebar size			ETA-20/0541, issued 2021-09-04											
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32
Tension	Rebar B500B	$N_{\text{Rd,seis}}$ [kN]	-	16,7	22,5	27,3	27,3	35,8	43,3	51,1	59,4	86,6	86,6	101,4
Shear	Rebar B500B	$V_{\text{Rd,seis}}$ [kN]	-	10,0	14,7	20,0	26,0	32,7	40,0	58,0	63,3	78,7	90,7	103,3



Materials

Mechanical properties

Rebar size	φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40
Nominal tensile strength f_{uk} [N/mm ²]	550	550	550	550	550	550	550	550	550	550	550	550	550	550
Yield strength f_{yk} [N/mm ²]	500	500	500	500	500	500	500	500	500	500	500	500	500	500
Stressed cross-section A_s [mm ²]	50,3	78,5	113	154	201	254	314	452	491	616	707	804	1018	1257
Moment of resistance W [mm ³]	50,3	98,2	170	269	402	573	785	1357	1534	2155	2650	3217	4580	6283

Material quality

Part	Material
Rebar EN 1992-1-1:2004 and AC:2010	Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1/ NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$

Setting information

Installation temperature range:

-5 °C to +40 °C

Service temperature range

Hilti HIT-RE 500 V4 injection mortar may be applied in the temperature ranges given below. An elevated base material temperature may lead to a reduction of the design bond resistance.

Temperature range	Base material temperature	Maximum long term base material temperature	Maximum short term base material temperature
Temperature range I	-40 °C to +40 °C	+24 °C	+40 °C
Temperature range II	-40 °C to +55 °C	+43 °C	+55 °C
Temperature range III	-40 °C to +75 °C	+55 °C	+75 °C

Maximum short term base material temperature

Short term elevated base material temperatures are those that occur over brief intervals, e.g. as a result of diurnal cycling.

Maximum long term base material temperature

Long term elevated base material temperatures are roughly constant over significant periods of time.

Working time and curing time

Temperature of the base material	Maximum working time	Minimum curing time
$T_{BM}^{2)}$	t_{work}	$t_{cure}^{1)}$
$-5\text{ °C} \leq T_{BM} < -1\text{ °C}$	2 h	168 h
$0\text{ °C} \leq T_{BM} < 4\text{ °C}$	2 h	48 h
$5\text{ °C} \leq T_{BM} < 9\text{ °C}$	2 h	24 h
$10\text{ °C} \leq T_{BM} < 14\text{ °C}$	1,5 h	16 h
$15\text{ °C} \leq T_{BM} < 19\text{ °C}$	1 h	12 h
$20\text{ °C} \leq T_{BM} < 24\text{ °C}$	30 min	7 h
$25\text{ °C} \leq T_{BM} < 29\text{ °C}$	20 min	6 h
$30\text{ °C} \leq T_{BM} < 34\text{ °C}$	15 min	5 h
$35\text{ °C} \leq T_{BM} < 39\text{ °C}$	12 min	4,5 h
$T_{BM} = 40\text{ °C}$	10 min	4 h

¹⁾ The curing time data are valid for dry base material only. In wet base material, the curing times must be doubled.

²⁾ The minimum temperature of the foil pack is +5° C.

Setting details


Rebar size			ETA-20/0541, issued 2021-09-04											Hilti tech. data				
			φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40		
Nominal diameter of drill bit	d_0	[mm]	10 12 ^{a)}	12 14 ^{a)}	14 ^{a)}	16 ^{a)}	18	20	22	25	30 32 ^{a)}	30 32 ^{a)}	35	37	40	45	55	
Effective anchorage and drill hole depth range ^{b)}	$h_{ef,min} = h_0$	[mm]	60	60	70	70	75	80	85	90	100	100	112	120	128	144	160	
	$h_{ef,max} = h_0$	[mm]	160	200	240	240	280	320	360	400	480	500	560	600	640	720	800	
Minimum base material thickness	h_{min}	[mm]	$h_{ef} + 30\text{mm}$ $\geq 100\text{mm}$				$h_{ef} + 2 d_0$											
Minimum spacing	s_{min}	[mm]	40	50	60	60	70	80	90	100	125	125	140	150	160	180	200	
Minimum edge distance	c_{min}	[mm]	40	45	45	45	50	50	60	65	70	70	75	80	80	180	200	
Critical spacing for splitting failure	$s_{cr,sp}$	[mm]	$2 C_{cr,sp}$															
Critical edge distance for splitting failure ^{c)}	$c_{cr,sp}$	[mm]	$1,0 h_{ef}$			for $h / h_{ef} \geq 2,0$												
			$4,6 h_{ef} - 1,8 h$			for $2,0 > h / h_{ef} > 1,3$												
			$2,26 h_{ef}$			for $h / h_{ef} \leq 1,3$												
Critical spacing for concrete cone failure	$s_{cr,N}$	[mm]	$2 C_{cr,N}$															
Critical edge distance for concrete cone failure	$c_{cr,N}$	[mm]	$1,5 h_{ef}$															

For spacing (edge distance) smaller than critical spacing (critical edge distance) the design loads have to be reduced.

a) both given values for drill bit diameter can be used

b) $h_{ef,min} \leq h_{ef} \leq h_{ef,max}$ (h_{ef} : embedment depth)

c) h : base material thickness ($h \geq h_{min}$)










Installation equipment

Rebar size	φ8	φ10	φ12	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40	
Rotary hammer	TE 2 (-A) – TE 40(-A)							TE40 – TE80							
Diamond coring tools	DD EC-1, DD 100 ... DD 160												-		
Other tools	Compressed air gun, set of cleaning brushes, hollow drill bit, roughening tool, dispenser, piston plug														



Drilling and cleaning diameters




Rebar size	Drilling		Diamond coring		Cleaning	Installation
	Hammer drill (HD)	Hollow Drill Bit (HDB) ^{c)}	Diamond coring (DD)	with roughening tool (RT)	Brush HIT-RB	Piston plug HIT-SZ
	d ₀ [mm]				size [mm]	
						
φ8	12 (10 ^{a)})	12	12 (10 ^{a)})	-	12 (10 ^{a)})	12
φ10	14 (12 ^{a)})	14 (12 ^{a)})	14 (12 ^{a)})	-	14 (12 ^{a)})	14 (12 ^{a)})
φ12	16 (14 ^{a)})	16 (14 ^{a)})	16 (14 ^{a)})	-	16 (14 ^{a)})	16 (14 ^{a)})
φ14	18	18	18	18	18	18
φ16	20	20	20	20	20	20
φ20	25	25	25	25	25	25
φ25	32	32	32	32	32	32
φ28	35	35	35	35	35	35
φ30	37	-	37	-	37	37
φ32	40	-	-	-	40	40
	-	-	42	-	42	42
φ36 ^{b)}	45 ^{b)}	-	-	-	45 ^{b)}	45 ^{b)}
φ40 ^{b)}	55 ^{b)}	-	-	-	55 ^{b)}	55 ^{b)}

a) Each of two given values can be used

b) Additional Hilti technical data.

c) No. cleaning required.

Associated components for the use of Hilti Roughening tool TE-YRT

Diamond coring		Roughening tool TE-YRT		Wear gauge RTG...
				
d ₀ [mm]		d ₀ [mm]		size
nominal	measured			
18	17,9 to 18,2	18		18
20	19,9 to 20,2	20		20
22	21,9 to 22,2	22		22
25	24,9 to 25,2	25		25
28	27,9 to 28,2	28		28
30	29,9 to 30,2	30		30
32	31,9 to 32,2	32		32
35	34,9 to 35,2	35		35

Minimum roughening time t_{roughen} ($t_{\text{roughen}} [\text{sec}] = h_{\text{ef}} [\text{mm}] / 10$)

$h_{\text{ef}} [\text{mm}]$	$t_{\text{roughen}} [\text{sec}]$
0 to 100	10
101 to 200	20
201 to 300	30
301 to 400	40
401 to 500	50
501 to 600	60

Setting instructions


*For detailed information on installation see instruction for use given with the package of the product.




Safety regulations.

Review the Material Safety Data Sheet (MSDS) before use for proper and safe handling! Wear well-fitting protective goggles and protective gloves when working with Hilti HIT-RE 500 V4.

Drilling

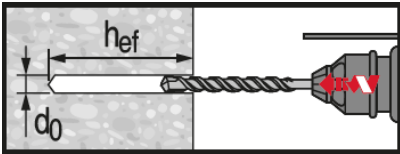


Hammer drilled hole

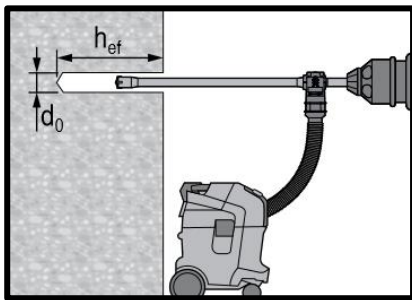


Hammer drilled hole with Hollow Drilled Bit (HDB)

No cleaning required




Diamond Coring




Diamond Coring + Roughening Tool

For dry and wet concrete only.
Before roughening, the borehole needs to be dry.




Cleaning (Inadequate hole cleaning=poor load values.)

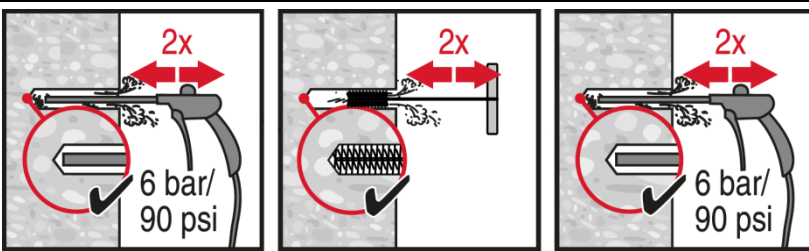

Hammer Drilling:

Compressed air cleaning (CAC)


for all drill hole diameters d_0 and drill hole depths $h_0 \leq 20 \cdot d$.

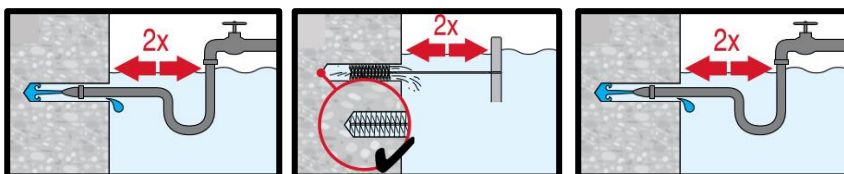

Hammer drilling:


Cleaning for under water:

For all bore hole diameters d_0 and all bore hole depth h_0 .

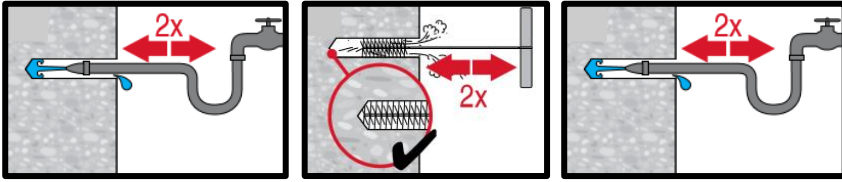


Hammer drilled flooded holes and diamond cored holes:

For all drill hole diameters d_0 and drill hole depths h_0 .

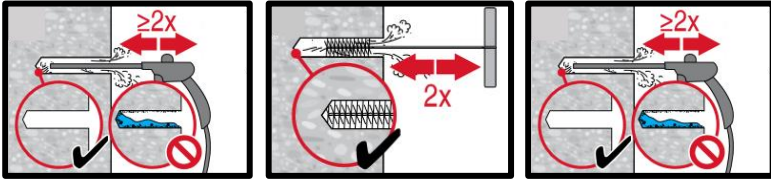


Diamond cored holes with Hilti roughening tool:


For all drill hole diameters d_0 and drill hole depths h_0 .

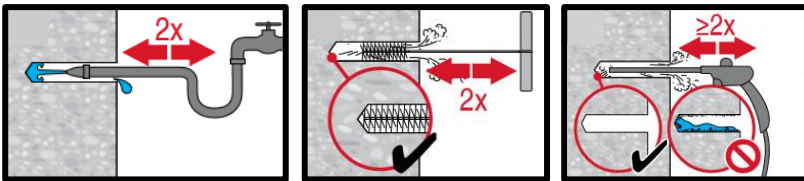


Injection preparation

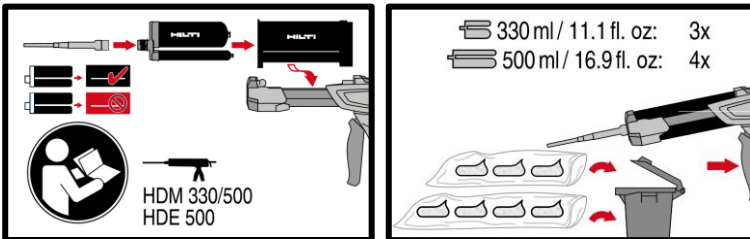


Injection system preparation.

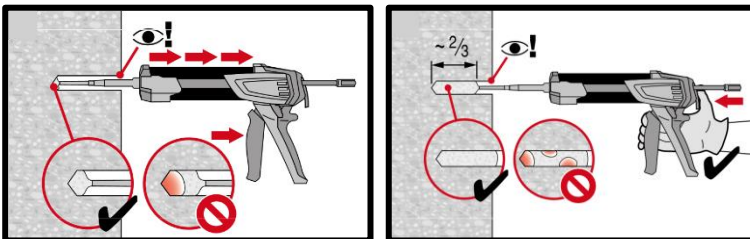

Injection method for drill hole depth $h_{ef} \leq 250$ mm.

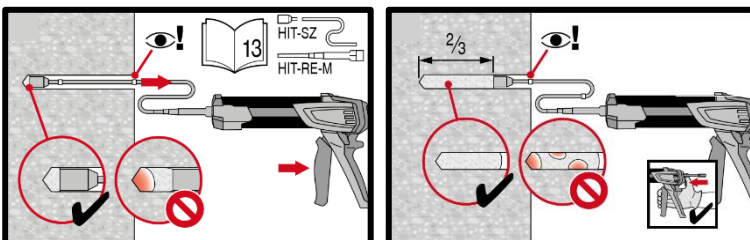


Injection method for drill hole depth $h_{ef} > 250$ mm.

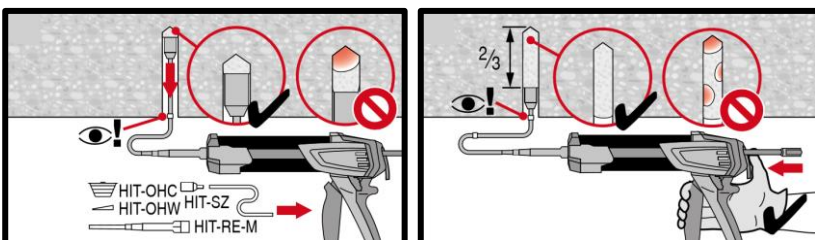


Injection method for overhead application.

Setting the element

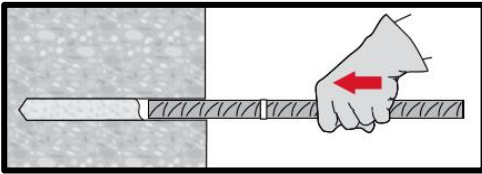

Setting element, observe working time " t_{work} ".

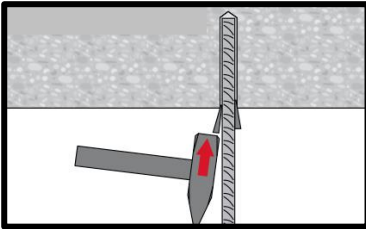

Setting element for overhead applications, observe working time " t_{work} ".

Loading the anchor: After required curing time t_{cure} the anchor can be loaded.



HIT-RE 500 V4 injection mortar

Rebar design (EN 1992-1-1, EOTA TR 069) / Rebar elements / Concrete

Injection mortar system



Foil pack: HIT-RE 500 V4
(available in 330, 500 and 1400 ml cartridges)



Rebar
($\phi 8$ - $\phi 40$)

Benefits

- **SafeSet** technology: Simplified method of borehole preparation using either Hilti hollow drill bit for hammer drilling or Roughening tool for diamond cored applications
- Allows the design of post-installed, moment-resisting reinforced concrete connections under static loading conditions without using a splice configuration according to TR 069
- Suitable for concrete C 12/15 to C 50/60
- ETA Data for 100 years working life
- High loading capacity
- Suitable for dry and water saturated concrete
- Non-corrosive to rebar elements
- Long working time at elevated temperatures
- Cures down to $-5\text{ }^{\circ}\text{C}$
- Odourless epoxy

Base material




Concrete (non-cracked)



Concrete (cracked)



Dry concrete



Wet concrete

Load conditions



Static/
quasi-static



Seismic




Fire
resistance

100
YEARS

Working life
100 years,

Installation conditions



Hammer
drilling



Diamond
coring



Hilti **SafeSet**
technology

Other informations



European
Technical
Assessment



CE
conformity



PROFIS
Engineering
design
Software

Approvals / certificates

Description	Authority / Laboratory	No. / date of issue
European technical assessment ^{a)}	CSTB, Marne la Vallée	ETA-20/0539 / 2022-07-05
European technical assessment ^{b)}	CSTB, Marne la Vallée	ETA-20/0540 / 2021-07-09
Allgemeine Bauartgenehmigung	DIBt, Berlin	Z-21.8-2123 / 2021-01-28
Engineering Judgement (120-y working life based on EAD 330087-01-0601)	BERMEIGSTER, Vienna	No.: 07/2021
Engineering Judgement (120-y working life based on EAD 332402-00-0601-v01)	BERMEIGSTER, Vienna	No.: 04/2022

^{a)} All data given in this section according to ETA-20/0539 issue 2022-07-05 (if not stated otherwise).

^{b)} All data given in this section according to ETA-20/0540 issue 2022-07-09 (if not stated otherwise).

Static and quasi-static loading

Static design acc. to EN 1992-1-1

Design bond strength in N/mm² for good bond conditions for service life of 50 and 100 years¹⁾

For hammer drilled holes, hammer drilled holes with hollow drill bit²⁾ and diamond cored with Hilti roughening tool TE-YRT³⁾:

Rebar size	ETA 20/0540, issued 2021-07-09								
	Concrete class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
φ8 - φ32	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3
φ34	1,6	2,0	2,3	2,6	2,9	3,3	3,6	3,9	4,2
φ36	1,6	1,9	2,2	2,6	2,9	3,2	3,5	3,8	4,1
φ40	1,5	1,8	2,1	2,5	2,8	3,1	3,4	3,7	3,9

¹⁾ For poor bond conditions multiply the values by 0,7.

²⁾ Hilti hollow drill bit available for element size φ10-φ28.

³⁾ Roughening tools are available for element size φ14-φ28.

For diamond cored holes (wet):

Rebar size	ETA 20/0540, issued 2021-07-09								
	Concrete class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
φ8 - φ12	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,0
φ14 - φ16	1,6	2,0	2,3	2,7	3,0	3,4	3,7	3,7	3,7
φ18 - φ32	1,6	2,0	2,3	2,7	3,0	3,4	3,4	3,4	3,4
φ34	1,6	2,0	2,3	2,6	2,9	3,3	3,3	3,3	3,3
φ36	1,6	1,9	2,2	2,6	2,9	3,2	3,2	3,2	3,2
φ40	1,5	1,8	2,1	2,5	2,8	2,8	2,8	2,8	2,8

¹⁾ For poor bond conditions multiply the values by 0,7.

Increasing factors in concrete

Drilling method	Concrete class	ETA 20/0540, issued 2021-07-09											
		Rebar size											
		φ8	φ10	φ12	φ14	φ16	φ20	φ25	φ28	φ30	φ32	φ36	φ40
Hammer drilled holes	C30/37	1,04											
Hammer drilled holes with hollow drill bit	C40/50	1,07											
Diamond cored holes	C50/60	1,09											
Diamond cored holes with roughening tool	C30/37 - C50/60	-				1,0				-			

Minimum anchorage length and minimum lap length

The minimum anchorage length $\ell_{b,min}$ and the minimum lap length $\ell_{0,min}$ according to EN 1992-1-1 shall be multiplied by relevant **Amplification factor** α_{lb} in the table below.

Amplification factor α_{lb} for the min. anchorage length and min. lap length:

Hammer drilled holes, hammer drilled holes with hollow drill bit¹⁾ and diamond cored with Hilti roughening tool TE-YRT²⁾

Rebar size	ETA 20/0540, issued 2021-07-09								
	Concrete class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
φ8 - φ40	1,0								

¹⁾ Hilti hollow drill bit available for element size φ10-φ28.

²⁾ Roughening tools are available for element size φ14-φ28.



Diamond cored holes (wet)

Rebar size	ETA 20/0540, issued 2021-07-09								
	Concrete class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
φ8 - φ12	1,0								
φ14 - φ36	Linear interpolation between diameters								
φ40	1,0	1,0	1,0	1,0	1,2	1,3	1,4	1,4	1,4

Anchorage length for characteristic steel strength $f_{yk} = 500 \text{ N/mm}^2$ for good conditions

Hammer drilling							
Rebar-size	Concrete class	f_{bd}	$l_{0,min}^{1)}$	$l_{b,min}^{2)}$	$l_{bd,y,\alpha_2=1}^{3)}$	$l_{bd,y,\alpha_2=0.7}^{4)}$	$l_{max}^{5)}$
		[N/mm ²]	[mm]	[mm]	[mm]	[mm]	[mm]
φ8	C20/25	2,3	200	113	378	265	1000
	C50/60	4,3	200	100	202	142	1000
φ10	C20/25	2,3	213	142	473	331	1000
	C50/60	4,3	200	100	253	177	1000
φ12	C20/25	2,3	255	170	567	397	1200
	C50/60	4,3	200	120	303	212	1200
φ14	C20/25	2,3	298	198	662	463	1400
	C50/60	4,3	210	140	354	248	1400
φ16	C20/25	2,3	340	227	756	529	1600
	C50/60	4,3	240	160	404	283	1600
φ20	C20/25	2,3	425	284	945	662	2000
	C50/60	4,3	300	200	506	354	2000
φ25	C20/25	2,3	532	354	1181	827	2500
	C50/60	4,3	375	250	632	442	2500
φ28	C20/25	2,3	595	397	1323	926	2800
	C50/60	4,3	420	280	708	495	2800
φ30	C20/25	2,3	638	425	1418	992	3000
	C50/60	4,3	450	300	758	531	3000
φ32	C20/25	2,3	681	454	1512	1059	3200
	C50/60	4,3	480	320	809	566	3200
φ36	C20/25	2,2	800	534	1779	1245	3200
	C50/60	4,1	540	360	954	668	3200
φ40	C20/25	2,1	932	621	2070	1449	3200
	C50/60	3,9	600	400	1115	780	3200

1) Minimum anchorage length for overlap join in case of: $\alpha_6 = 1,5$

2) Minimum anchorage length for simply supported connections

3) Anchorage length for simply supported connections in case of: $\alpha_1 = \alpha_2 = \alpha_3 = \alpha_4 = \alpha_5 = 1$. - (design for yielding)

4) Anchorage length for simply supported connections in case of: $\alpha_1 = \alpha_3 = \alpha_4 = \alpha_5 = 1$; $\alpha_2 = 0.7$ - (design for yielding)

5) Maximum feasible embedment depth due to mortar installation limitations.

Static design acc. to EOTA TR 069

Design parameter for working life of 50 and 100 years¹⁾

For hammer drilled holes, hammer drilled holes with hollow drill bit²⁾ and diamond cored with Hilti roughening tool TE-YRT³⁾:

Rebar size		ETA 20/0539, issued 2022-07-05															
		φ8	φ10	φ12	φ13	φ14	φ16	φ18	φ20	φ22	φ24	φ25	φ28	φ30	φ32	φ36	φ40
Combined pullout and concrete cone failure in non-cracked concrete C20/25																	
Characteristic resistance $\tau_{Rk,ucr}$	[N/mm ²]	10	15	15	15	15	15	14	14	14	14	14	14	13	13	12	11
Characteristic resistance $\tau_{Rk,100,ucr}$	[N/mm ²]	10	15	15	15	15	15	14	14	14	14	14	14	13	13	12	11
Bond-splitting failure																	
Product basic factor A_k	[-]	4,4															
Exponent for influence of concrete compressive strength sp_1	[-]	0,29															
Exponent for influence of rebar diameter ϕ sp_2	[-]	0,27															
Exponent for influence of concrete cover sp_3	[-]	0,68															
Exponent for influence of side concrete cover sp_4	[-]	0,35															
Exponent for influence of anchorage length l_{b1}	[-]	0,60															
Influence of cracked concrete on combined pullout and concrete cone failure																	
Factor for influence of cracked concrete Ω_{cr}	[-]	1,00	0,96	0,90	0,88	0,85	0,82	0,78	0,76	0,73	0,71	0,70	0,68	0,66	0,65	0,62	0,60

¹⁾ Temperate range I: (min. base material temperature -40°C, max. long term/short term base material temperature: +24°C/40°C).

²⁾ Hilti hollow drill bit available for element size φ10-φ28.

³⁾ Hilti Roughening tools are available for element size φ14-φ28.

For diamond coring:

Rebar size		ETA 20/0539, issued 2022-07-05															
		φ8	φ10	φ12	φ13	φ14	φ16	φ18	φ20	φ22	φ24	φ25	φ28	φ30	φ32	φ36	φ40
Combined pullout and concrete cone failure in non-cracked concrete C20/25																	
Characteristic resistance $\tau_{Rk,ucr}$	[N/mm ²]	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	10	10	10	2)	
Characteristic resistance $\tau_{Rk,100,ucr}$	[N/mm ²]	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	9,5	10	10	10	2)	
Bond-splitting failure																	
Product basic factor A_k	[-]	4,4															2)
Exponent for influence of concrete compressive strength sp_1	[-]	0,26															2)
Exponent for influence of rebar diameter ϕ sp_2	[-]	0,25															2)
Exponent for influence of concrete cover sp_3	[-]	0,52															2)
Exponent for influence of side concrete cover sp_4	[-]	0,26															2)
Exponent for influence of anchorage length l_{b1}	[-]	0,65															2)
Influence of cracked concrete on combined pullout and concrete cone failure																	
Factor for influence of cracked concrete Ω_{cr}	[-]	0,5															2)

¹⁾ Temperate range I: (min. base material temperature -40°C, max. long term/short term base material temperature: +24°C/40°C);

²⁾ No performance assessed



Seismic loading

Seismic design acc. to EN 1998-1

Design bond strength according to in N/mm² for good bond conditions for working life of 50 and 100 years¹⁾

For hammer drilled holes, hammer drilled holes with hollow drill bit²⁾ and diamond cored with Hilti roughening tool TE-YRT³⁾:

Rebar size	ETA-20/0540, issued 2021-07-09							
	Concrete class							
	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
φ8 - φ32	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3
φ34	2,0	2,3	2,6	2,9	3,3	3,6	3,9	4,2
φ36	1,9	2,2	2,6	2,9	3,2	3,5	3,8	4,1
φ40	1,8	2,1	2,5	2,8	3,1	3,4	3,7	3,9

¹⁾ For poor bond conditions multiply the values by 0,7.

²⁾ Hilti hollow drill bit available for element size φ10-φ28.

³⁾ Hilti Roughening tools are available for element size φ14-φ28.

For diamond cored holes:

Rebar size	ETA-20/0540, issued 2021-07-09							
	Concrete class							
	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
φ12	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,0
φ13 - φ32	2,0	2,3	2,7	3,0	3,3	3,4	3,4	3,4
φ34	1,9	2,3	2,3	2,3	2,3	2,3	2,3	2,3
φ36	1,9	2,2	2,2	2,2	2,2	2,2	2,2	2,2
φ40	1,8	2,1	2,1	2,1	2,1	2,1	2,1	2,1

¹⁾ For poor bond conditions multiply the values by 0,7.

Seismic design acc. to EOTA TR 069

Design parameter under seismic action for working life of 50 and 100 years¹⁾

For hammer drilled holes, hammer drilled holes with hollow drill bit²⁾


Rebar size	ETA 20/0539, issued 2022-07-05																
	φ8	φ10	φ12	φ13	φ14	φ16	φ18	φ20	φ22	φ24	φ25	φ28	φ30	φ32	φ36	φ40	
Pull-out failure																	
Reduction factor for pull-out resistance under seismic action $\alpha_{eq,p}$	[-]	0,61														0,65	
Influence of cracked concrete on bond resistance τ_{Rd}																	
Factor for influence of cracked concrete $\Omega_{cr,03}$	[-]	1,00	0,96	0,90	0,88	0,85	0,82	0,78	0,76	0,73	0,71	0,70	0,68	0,66	0,65	0,62	0,60
Factor for influence of cracked concrete $\Omega_{cr,05}$	[-]	0,79	0,81	0,82	0,83	0,84	0,82	0,78	0,76	0,73	0,71	0,70	0,68	0,66	0,65	0,62	0,60
Factor for influence of cracked concrete $\Omega_{cr,08}$	[-]	0,59	0,61	0,63	0,64	0,65	0,67	0,69	0,71	0,72	0,71	0,70	0,68	0,66	0,65	0,62	0,60
Bond-splitting failure																	
Reduction factor for bond-splitting resistance under seismic action $\alpha_{eq,sp}$	[-]																0,95

¹⁾ For poor bond conditions multiply the values by 0,7.

²⁾ Hilti hollow drill bit available for element size φ10-φ28.

Fire resistance

Temperature reduction factor $k_{fi}(\theta)$ for concrete class C20/25 for good bond conditions according to ETA-20/0540 for working life of 50 and 100 years¹⁾

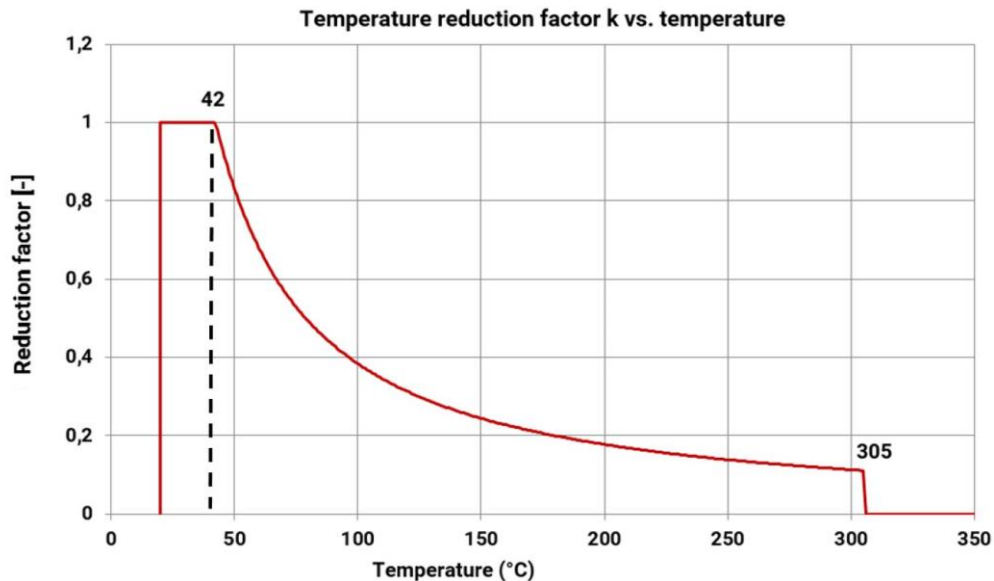

The design value of the bond resistance $f_{bd,fi}$ under fire exposure has to be calculated by the following equation:

$$f_{bd,fi} = k_{b,fi}(\theta) \cdot f_{bd,PIR} \cdot \frac{\gamma_c}{\gamma_{M,fi}} \quad \text{for a working life of 50 years}$$

$$f_{bd,fi,100y} = k_{b,fi,100y}(\theta) \cdot f_{bd,PIR,100y} \cdot \frac{\gamma_c}{\gamma_{M,fi}} \quad \text{for a working life of 100 years}$$

$$\text{with } \theta \leq 305^\circ\text{C: } k_{b,fi}(\theta) = \frac{651,24 \cdot \theta^{-1,115}}{f_{bd,PIR} \cdot 4,3} \leq 1,0 \quad \text{for a working life of 50 years}$$

$$k_{b,fi,100y}(\theta) = \frac{651,24 \cdot \theta^{-1,115}}{f_{bd,PIR,100y} \cdot 4,3} \leq 1,0 \quad \text{for a working life of 100 years}$$

$$\theta > 305^\circ\text{C: } k_{b,fi}(\theta) = k_{b,fi,100y}(\theta) = 0,0$$

$f_{bd,fi,50y}$ = Design value of the bond resistance in case of fire in N/mm² (service life 50 years).

$f_{bd,fi,100y}$ = Design value of the bond resistance in case of fire in N/mm² (service life 100 years).

(θ) = Temperature in °C in the mortar layer.

$k_{b,fi}(\theta)$ = Reduction factor under fire exposure.

$k_{b,fi,100y}(\theta)$ = Reduction factor under fire exposure for a working life of 100 years.

$f_{bd,PIR}$ = Design value of the bond resistance in N/mm² in cold condition according to Table C3 or C6 of ETA 20/0540 considering the concrete classes, the rebar diameter, the drilling method and the bond conditions according to EN 1992-1-1.

$f_{bd,PIR,100y}$ = Design value of the bond strength in N/mm² in cold condition according to Table C3 or Table C6 considering the concrete classes, the rebar diameter, the drilling method and the bond conditions according to EN 1992-1-1 for a working life of 100 years.

γ_c = Partial safety factor according to EN 1992-1-1

$\gamma_{M,fi}$ = Partial safety factor according to EN 1992-1-2

For evidence under fire exposure the anchorage length shall be calculated according to EN 1992-1-1:2004+AC:2010 Equation 8.3 using the temperature-dependent bond resistance $f_{bd,fi}$.



Materials

Mechanical properties

Rebar size		φ8	φ10	φ12	φ13	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ30	φ32	φ36	φ40
Nominal tensile strength f_{uk}	$\sqrt{\text{mm}^2}$	550	550	550	550	550	550	550	550	550	550	550	550	550	550	550
Yield strength f_{yk}	$\sqrt{\text{mm}^2}$	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
Stressed cross-section A_s	$[\text{mm}^2]$	50,3	78,5	113	133	154	201	254	314	452	491	616	707	804	1018	1257
Moment of resistance W	$[\text{mm}^3]$	50,3	98,2	170	216	269	402	573	785	1357	1534	2155	2650	3217	4580	6283

Material quality

Part	Material
Rebar EN 1992-1-1:2004 and AC:2010	Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCL of EN 1992-1-1/ NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$

Fitness for use

Some creep tests have been conducted in accordance with EAD 330087 in the following conditions: **in dry environment at 50 °C during 90 days.**

These tests show an excellent behaviour of the post-installed connection made with HIT-RE 500 V4: low displacements with long term stability, failure load after exposure above reference load.

Resistance to chemical substances

Chemicals tested	Content (%)	Resistance	Chemical tested	Content (%)	Resistance
Toluene	47,5	+	Sodium hydroxide 20%	100	-
Iso-octane	30,4	+	Triethanolamine	50	-
Heptane	17,1	+	Butylamine	50	-
Methanol	3	+	Benzyl alcohol	100	-
Butanol	2	+	Ethanol	100	-
Toluene	60	+	Ethyl acetate	100	-
Xylene	30	+	Methyl ethyl ketone (MEK)	100	-
Methylnaphthalene	10	+	Trichlorethylene	100	-
Diesel	100	+	Lutensit TC KLC 50	3	+
Petrol	100	+	Marlophen NP 9,5	2	+
Methanol	100	-	Water	95	+
Dichloromethane	100	-	Tetrahydrofurane	100	-
Mono-chlorobenzene	100	o	Demineralized water	100	+
Ethylacetat	50	+	Salt water	saturated	+
Methylisobutylketone	50	+	Salt spray testing	-	+
Salicylic acid-	50	+	SO ₂	-	+
Acetophenon	50	+	Enviroment/wheather	-	+
Acetic acid	50	-	Oil for formwork (forming oil)	100	+
Propionic acid	50	-	Concentrate plasticizer	-	+
Sulfuric acid	100	-	Concrete potash solution	-	+
Nitric acid	100	-	Concrete potash solution	-	+
Hydrochloric acid	36	-	Saturated suspension of borehole cuttings	-	+
Potassium hydroxide	100	-			

- + Resistant
- Not resistant
- o Partially Resistant

Setting information

Installation temperature range

-5 °C to +40 °C

Service temperature range

Hilti HIT-RE 500 V4 injection mortar may be applied in the temperature ranges given below. An elevated base material temperature may lead to a reduction of the design bond resistance.

ETA-20/0540

Temperature range	Base material temperature	Maximum long term base material temperature	Maximum short term base material temperature
Temperature range I	-40 °C to +80 °C	+50 °C	+80 °C

ETA-20/0539

Temperature range	Base material temperature	Maximum long term base material temperature	Maximum short term base material temperature
Temperature range I	-40 °C to +40 °C	+24 °C	+40 °C
Temperature range II	-40 °C to +55 °C	+43 °C	+55 °C
Temperature range III	-40 °C to +75 °C	+55 °C	+75 °C

Maximum short term base material temperature

Short-term elevated base material temperatures are those that occur over brief intervals, e.g. as result of diurnal cycling.

Maximum long term base material temperature

Long-term elevated base material temperatures are roughly constant over significant periods of time.

Working time and curing time¹⁾

Temperature of the base material	Maximum working time	Initial curing time	Minimum curing time
$T_{BM}^{2)}$	t_{work}	$t_{cure,ini}$	t_{cure}
$5\text{ °C} \leq T_{BM} < -1\text{ °C}$	2 h	48 h	168 h
$0\text{ °C} \leq T_{BM} < 4\text{ °C}$	2 h	24 h	48 h
$5\text{ °C} \leq T_{BM} < 9\text{ °C}$	2 h	16 h	24 h
$10\text{ °C} \leq T_{BM} < 14\text{ °C}$	1,5 h	12 h	16 h
$15\text{ °C} \leq T_{BM} < 19\text{ °C}$	1 h	8 h	16 h
$20\text{ °C} \leq T_{BM} < 24\text{ °C}$	30 min	4 h	7 h
$25\text{ °C} \leq T_{BM} < 29\text{ °C}$	20 min	3,5 h	6 h
$30\text{ °C} \leq T_{BM} < 34\text{ °C}$	15 min	3 h	5 h
$35\text{ °C} \leq T_{BM} < 39\text{ °C}$	12 min	2 h	4,5 h
$T_{BM} = 40\text{ °C}$	10 min	2 h	4 h

¹⁾ The curing time data are valid for dry base material only. In wet base material, the curing times must be doubled.

²⁾ The minimum temperature of the foil pack is +5° C.


Installation equipment

Rebar size	φ8	φ10	φ12	φ13	φ14	φ16	φ18	φ20	φ24	φ25	φ28	φ32	φ34	φ36	φ40	
Rotary hammer	TE 2 (-A)– TE 40(-A)						TE40 – TE80									
Other tools	Blow out pump ($h_{ef} \leq 10 \cdot d$)						-									
	Compressed air gun ^{a)} Set of cleaning brushes ^{b)} , dispenser, piston plug Roughening tools															

a) Compressed air gun with extension hose for all drill holes deeper than 250 mm (for φ 8 to φ 12) or deeper than $20 \cdot \phi$ (for φ > 12 mm).

b) Automatic brushing with round brush for all drill holes deeper than 250 mm (for φ 8 to φ 12) or deeper than $20 \cdot \phi$ (for φ > 12 mm).

Minimum concrete cover c_{min} of the post-installed rebar

Drilling method	Rebar size	Minimum concrete cover c_{min} [mm]		
		Without drilling aid	With drilling aid	
Hammer drilling (HD) and (HDB)	φ < 25	$30 + 0,06 \cdot l_v \geq 2 \cdot \phi$	$30 + 0,02 \cdot l_v \geq 2 \cdot \phi$	
	φ ≥ 25	$40 + 0,06 \cdot l_v \geq 2 \cdot \phi$	$40 + 0,02 \cdot l_v \geq 2 \cdot \phi$	
Compressed air drilling (CA)	φ < 25	$50 + 0,08 \cdot l_v$	$50 + 0,02 \cdot l_v$	
	φ ≥ 25	$60 + 0,08 \cdot l_v \geq 2 \cdot \phi$	$60 + 0,02 \cdot l_v \geq 2 \cdot \phi$	
Diamond coring in wet (PCC) dry (DD)	φ < 25	Drill stand works like a drilling aid	$30 + 0,02 \cdot l_v \geq 2 \cdot \phi$	
	φ ≥ 25		$40 + 0,02 \cdot l_v \geq 2 \cdot \phi$	
Diamond coring with Roughening tool TE-YRT (RT)	φ < 25	$30 + 0,06 \cdot l_v \geq 2 \cdot \phi$	$30 + 0,02 \cdot l_v \geq 2 \cdot \phi$	
	φ ≥ 25	$40 + 0,06 \cdot l_v \geq 2 \cdot \phi$	$40 + 0,02 \cdot l_v \geq 2 \cdot \phi$	

Dispenser and corresponding maximum embedment depth $l_{v,max}$

Rebar size	HDM 330, HDM 500	HDE 500	HIT-P8000D
	$l_{v,max}$ [mm]		
φ8	1000	1000	-
φ10		1000	-
φ12		1200	1200
φ13		1300	1300
φ14		1400	1400
φ16		1600	1600
φ18	700	1800	1800
φ20	600	2000	2000
φ22	500	1800	2200
φ24	300	1300	2400
φ25	300	1500	2500
φ26	300	1000	2600
φ28	300	1000	2800
φ30	-	1000	3000
φ32		700	3200
φ34		600	
φ36		600	
φ40		400	

Drilling diameters

Rebar size	Drilling			Diamond coring		
	Hammer drill (HD)	Hollow Drill Bit (HDB) ^{b)}	Compressed air drill (CA) ^{c)}	Dry (PCC) ^{b)c)}	Wet (DD) ^{c)}	With roughening tool (RT) ^{b)}
	d ₀ [mm]					
φ8	12 (10 ^{a)})	12	-	-	12 (10 ^{a)})	-
φ10	14 (12 ^{a)})	14 (12 ^{a)})	-	-	14 (12 ^{a)})	-
φ12	16 (14 ^{a)})	16 (14 ^{a)})	17	-	16 (14 ^{a)})	-
φ12/ HZA(-R) M12	16	16	-	-	16	-
φ13	16	16	17	-	16	-
φ14	18	18	17	-	18	18
φ16	20	20	20	-	20	20
φ18	22	22	22	-	22	22
φ20	25	25	26	-	25	25
φ22	28	28	28	-	28	28
φ24	32 (30 ^{a)})	32 (30 ^{a)})	32	35	32	32
φ25	32 (30 ^{a)})	32 (30 ^{a)})	32	35	32	32
φ26	35	35	35	35	35	35
φ28	35	35	35	35	35	35
φ30	37	-	37	35	37	-
φ32	40	-	40	47	40	-
φ34 ^{c)}	45	-	42	47	45	-
φ36 ^{c)}	45	-	45	47	47	-
φ40 ^{c)}	55	-	57	52	52	-

a) Each of two given values can be used.

b) No cleaning required.

c) Only for EN 1992-1-1 design, not available for TR 069 design.

Associated components for the use of Hilti Roughening tool TE-YRT

Diamond coring		Roughening tool TE-YRT	Wear gauge RTG...
d ₀ [mm]		d ₀ [mm]	size
nominal	measured		
18	17,9 to 18,2	18	18
20	19,9 to 20,2	20	20
22	21,9 to 22,2	22	22
25	24,9 to 25,2	25	25
28	27,9 to 28,2	28	28
30	29,9 to 30,2	30	30
32	31,9 to 32,2	32	32
35	34,9 to 35,2	35	35

Minimum roughening time t_{roughen} (t_{roughen} [sec] = h_{ef} [mm] / 10)

h _{ef} [mm]	t _{roughen} [sec]
0 to 100	10
101 to 200	20
201 to 300	30
301 to 400	40
401 to 500	50
501 to 600	60




Setting instructions

***For detailed information on installation see instruction for use given with the package of the product.**


Safety regulations.

Review the Material Safety Data Sheet (MSDS) before use for proper and safe handling! Wear well-fitting protective goggles and protective gloves when working with Hilti HIT-RE 500 V4.


Drilling

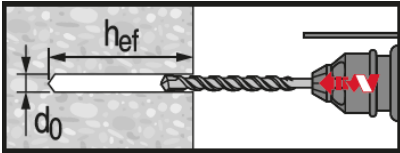


Hammer drilled hole (HD)

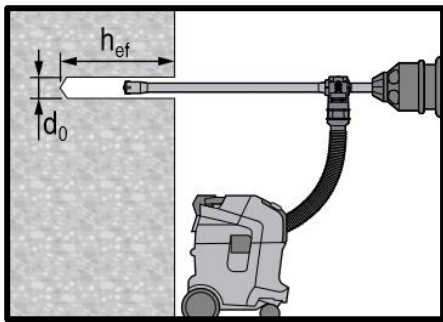


Hammer drilled hole with Hollow Drilled Bit (HDB)
No cleaning required.




Diamond Drilling (DD)




Diamond Drilling + Roughening Tool (DD+RT)




Cleaning (Inadequate hole cleaning=poor load values.)

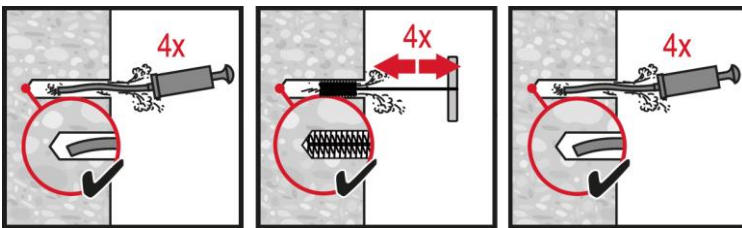

Hammer Drilling:
Manual cleaning (MC)
For drill diameters $d_0 \leq 20$ mm and drill hole depth $h_0 \leq 10 \cdot d$.

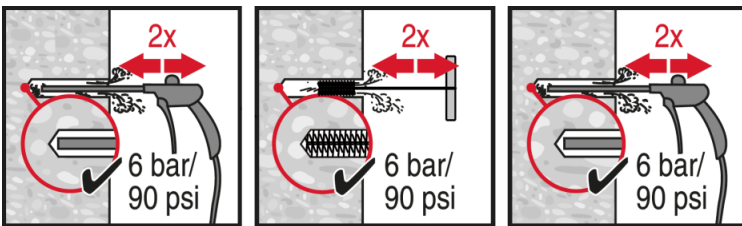


Hammer Drilling:
Compressed air cleaning (CAC)
For all drill hole diameters d_0 and drill hole depths $h_0 \leq 20 \cdot d$.

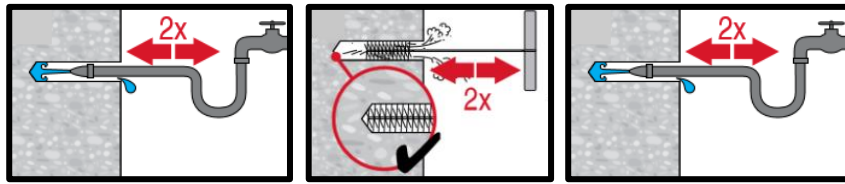


Diamond cored holes:

For all drill hole diameters d_0 and drill hole depths h_0 .

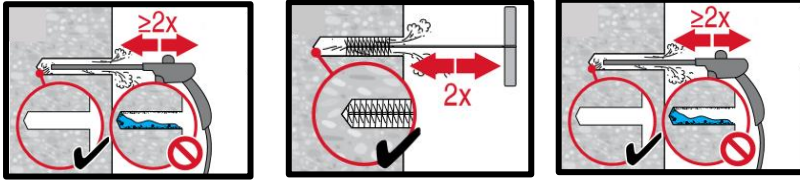


Diamond cored holes with Hilti roughening tool:


For all drill hole diameters d_0 and drill hole depths h_0 .

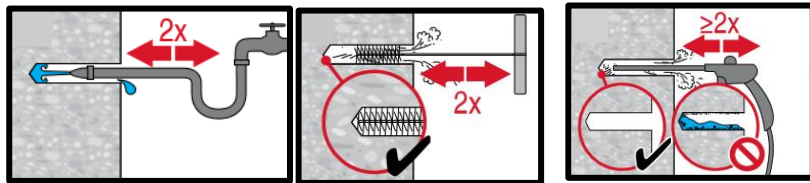


Injection preparation

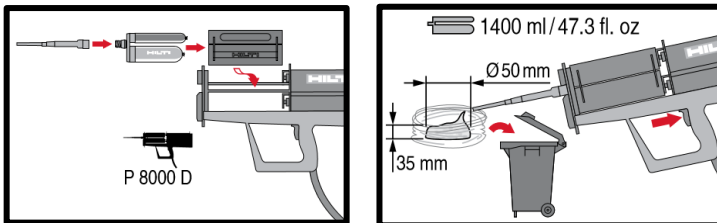


Injection system preparation.

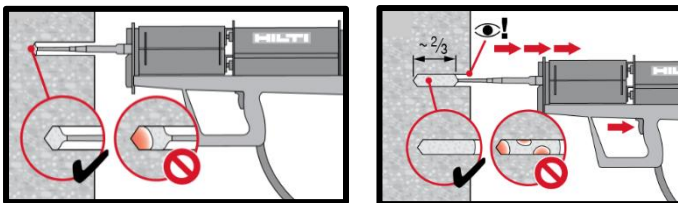

Injection method for drill hole depth
 $h_{ef} \leq 250$ mm.

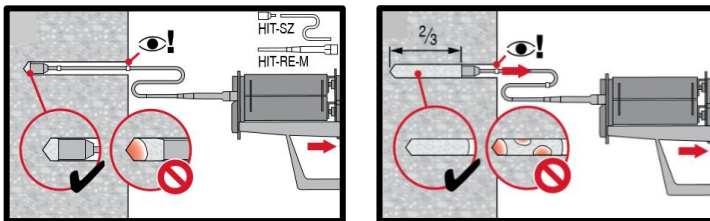


Injection method for drill hole depth
 $h_{ef} > 250$ mm.

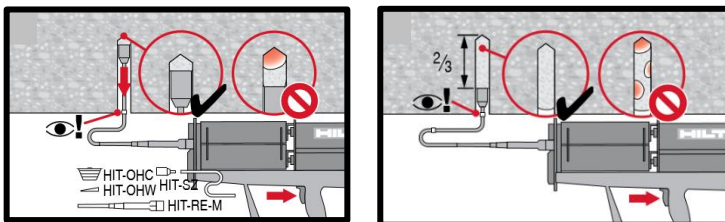


Injection method for overhead application.



Setting the element

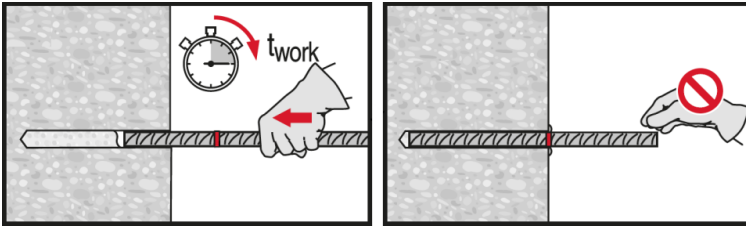

Setting element, observe working time " t_{work} ".

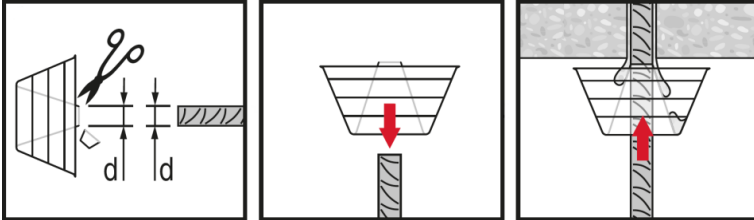

Setting element for overhead applications, observe working time " t_{work} ".

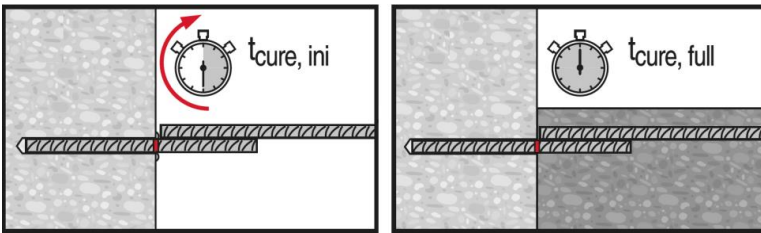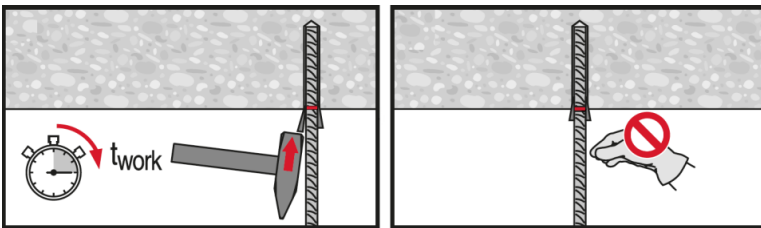

Apply full load only after curing time " t_{cure} ".